

NASA Contractor Report 4270

A Direct-Inverse Method for Transonic and Separated Flows About Airfoils

Leland A. Carlson

GRANT NSG-1174

JANUARY 1990




(NASA-CR-4270) A DIRECT-INVERSE METHOD FOR
TRANSONIC AND SEPARATED FLOWS ABOUT AIRFOILS
Final Report (Texas A&M Univ.) 72 p

CSCL 01A

N90-15072

Unclass

#1/02 0251659

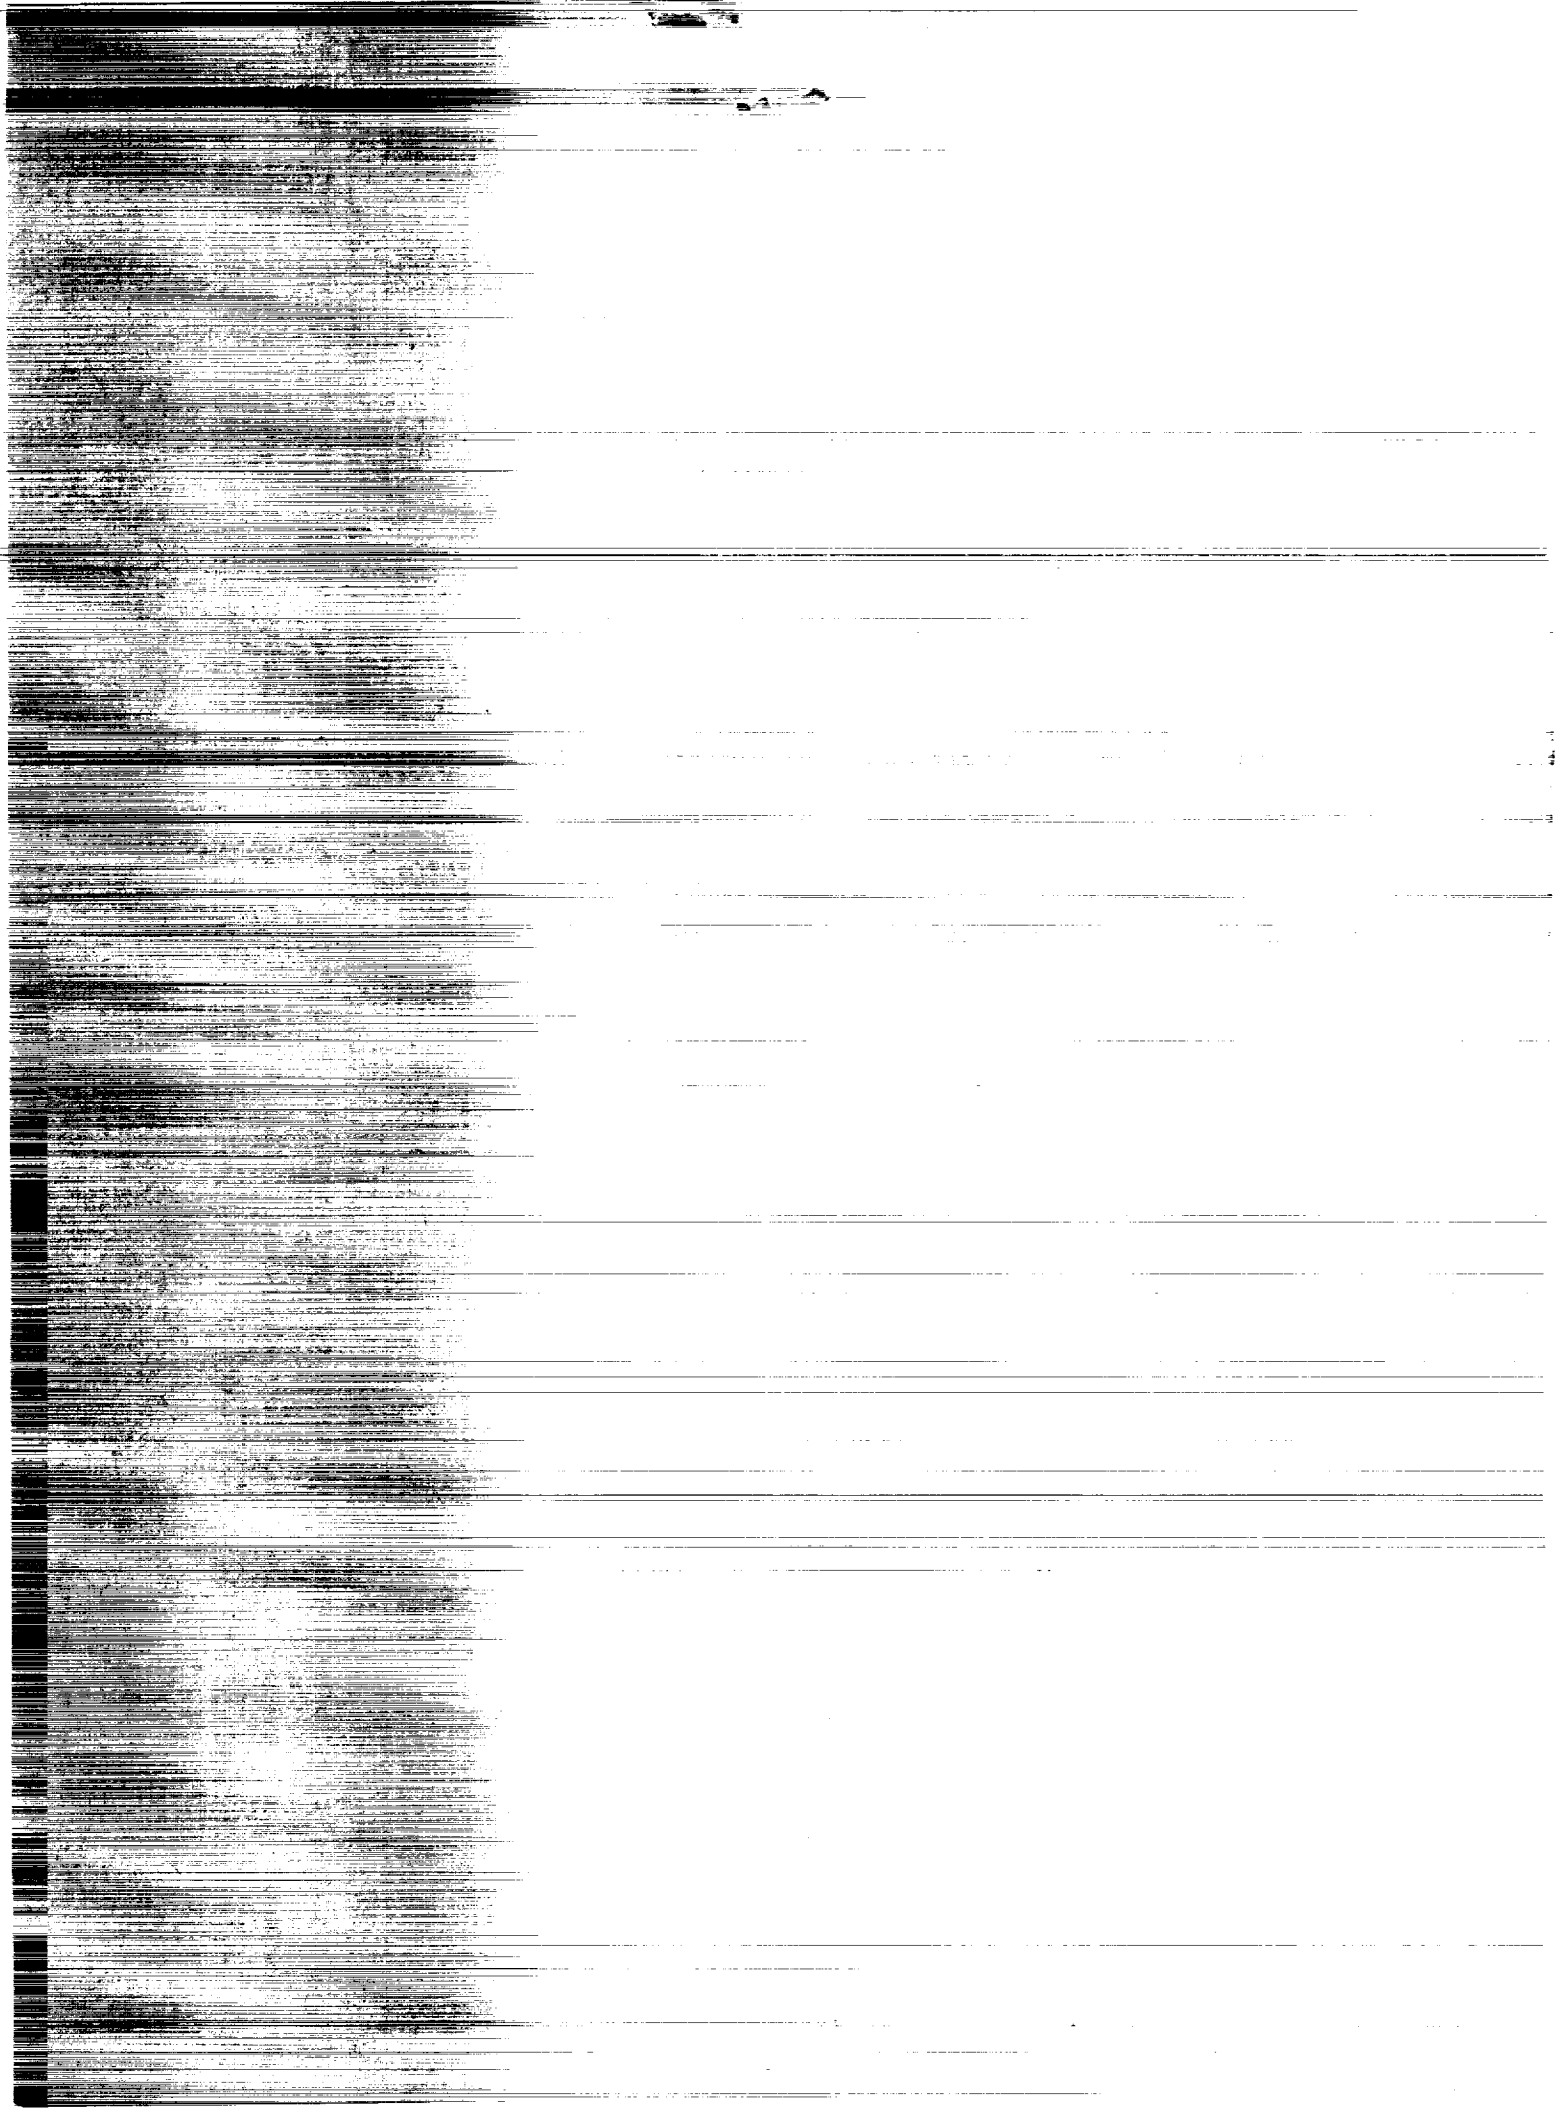

NASA Contractor Report 4270

A Direct-Inverse Method for Transonic and Separated Flows About Airfoils

Leland A. Carlson
Aerospace Engineering Department
Texas A&M University
College Station, Texas

Prepared for
Langley Research Center
under Grant NSG-1174



National Aeronautics and
Space Administration
Office of Management
Scientific and Technical
Information Division

1990

A DIRECT-INVERSE METHOD FOR TRANSONIC AND SEPARATED
FLOWS ABOUT AIRFOILS

Leland A. Carlson
Aerospace Engineering Department
Texas A&M University

SUMMARY

A direct-inverse technique and computer program called TAMSEP that can be used for the analysis of the flow about airfoils at subsonic and low transonic freestream velocities is presented. The method is based upon a direct-inverse nonconservative full potential inviscid method, a Thwaites laminar boundary layer technique, and the Barnwell turbulent momentum integral scheme; and it is formulated using Cartesian coordinates. Since the method utilizes inverse boundary conditions in regions of separated flow, it is suitable for predicting the flowfield about airfoils having trailing edge separated flow under high lift conditions. Comparisons with experimental data indicate that the method should be a useful tool for applied aerodynamic analyses.

SYMBOLS

a	isentropic speed of sound
c_3^*	boundary layer coefficient in separated pressure correlation
C_D	airfoil drag coefficient
C_L	airfoil lift coefficient
C_P	pressure coefficient
M	Mach number
q	velocity
U, V	velocity components in the x and y directions, respectively
U_e	transformed velocity at boundary layer edge
u	velocity in the boundary layer
u^*, u_β	law-of-the-wall and law-of-the-wake velocity parameters
x, y	Cartesian coordinates
α	angle of attack
γ	ratio of specific heats, assumed to be 1.4
Γ	circulation
δ	boundary layer thickness
θ	polar coordinate
ξ, η	computational coordinates
Φ	potential function

ϕ perturbation potential

Subscripts:

∞ freestream condition

b body

e boundary layer edge

i,j grid location

LE leading edge

SEP separation point

TE trailing edge

ξ, η differentiation

x, y differentiation

GENERAL DESCRIPTION

INTRODUCTION

Over the past decade, several finite-difference potential flow methods¹⁻³ have been developed and successfully used for the design and analysis of subsonic and transonic airfoils at and near cruise conditions. However, in the analysis of high performance airfoils, aerodynamicists would also like to be able to predict airfoil pressure distributions and aerodynamic coefficients at high lift, high angle-of-attack conditions. Since such situations are frequently characterized by regions of separated flow on the upper surface and are dominated by strong viscous interaction effects, inviscid methods alone are not applicable. Furthermore, subsonic-transonic analysis methods^{3,4} which couple inviscid and boundary layer solutions typically only include the effects of weak viscous interaction and generally fail to give accurate results when separated flow exists on the upper surface.

However, it has been demonstrated⁵⁻⁸ that the direct-inverse technique coupled to a suitable boundary layer method can be successfully applied to low speed flows about airfoils having massive separation. In addition, Barnwell⁹, Dvorak and Choi¹⁰, and Taverna¹¹ have developed similar methods for transonic flows. Barnwell's method, however, is limited in application in that it utilizes for its inviscid solver the transonic small perturbation equation. Further, references 9 and 11 only include the effects of viscous interaction due to a turbulent boundary layer. On most airfoils, particularly on the lower surface at high angles of attack, extensive regions of laminar flow exist.

This report describes a flow model and computer program, called TAMSEP, which can be used to predict the flowfield about a single element transonic airfoil at high angle of attack high lift conditions with trailing edge separation. Since the method is based upon the TRANDES⁴ and TRANSEP⁶ codes, it can also be used for subsonic-transonic analyses not involving separation.

METHOD OF APPROACH

The present approach is based upon the direct-inverse method developed in the TRANDES and TRANSEP programs and the ability of this method to use either the displacement surface (airfoil ordinate plus displacement thickness) or pressure as the airfoil boundary condition. For the high angle-of-attack case, the airfoil lower surface only experiences weak viscous interaction and frequently has a long laminar run before transitioning to fully turbulent flow. Thus, the present model includes an initial laminar boundary layer calculation in its viscous interaction section. On the upper surface the

boundary layer is also initially laminar, but it quickly becomes turbulent in character followed in many cases by boundary layer separation and a separated zone which can extend over a significant portion of the airfoil surface. In the present model, this separated region is treated inversely in that the pressure distribution along the effective displacement surface streamline is determined iteratively as part of the solution and used as the airfoil boundary condition. Consequently, the present method has been modeled as shown on figure 1.

To obtain the inviscid portion of the flowfield, the full potential equation for two-dimensional compressible flow is used in nonconservative form as

$$\left(a^2 - \Phi_x^2\right)\Phi_{xx} - 2\Phi_x\Phi_y\Phi_{xy} + \left(a^2 - \Phi_y^2\right)\Phi_{yy} = 0 \quad (1)$$

where the subscripts denote partial differentiation. By defining a perturbation potential, ϕ , such that

$$\Phi = xq_\infty \cos \alpha + yq_\infty \sin \alpha + q_\infty \phi \quad (2)$$

where the velocity components are given by

$$U = \Phi_x = q_\infty(\cos \alpha + \phi_x) \quad (3a)$$

and

$$V = \Phi_y = q_\infty(\sin \alpha + \phi_y) \quad (3b)$$

the governing equation in terms of the perturbation potential can be written as

$$\left(a^2 - U^2\right)\phi_{xx} - 2UV\phi_{xy} + \left(a^2 - V^2\right)\phi_{yy} = 0 \quad (4)$$

with

$$a^2 = a_\infty^2 - \left(\frac{\gamma - 1}{2}\right)(U^2 + V^2 - q_\infty^2) \quad (5)$$

The nonconservative form of the potential equation was selected for the present problem because results for two-dimensional flows obtained with it agree better with Euler solutions than those obtained using the fully conservative form of the equation¹². In addition, the conservative

formulation appears to break down in two-dimensional cases shortly after the onset of supercritical flow¹³.

In the present model, equations (3-5) are finite differenced using a rotated difference scheme and solved iteratively using column relaxation in a stretched Cartesian grid which maps the infinite domain to a finite computational box. The appropriate boundary condition at infinity is^{14,15}

$$\phi = \frac{-\Gamma}{2\pi} \tan^{-1} \left[\sqrt{1 - M_{\infty}^2} (\theta - \alpha) \right] \quad (6)$$

where θ is the polar angle, and Γ is the circulation, which is determined by the change in potential across the Kutta-Joukowski cut at the trailing edge of the airfoil.

Likewise, the appropriate airfoil boundary condition in the direct regions (regions without separation having only weak viscous interaction) is the flow tangency condition given by the ordinates of the airfoil displacement surface, i.e.

$$\left. \frac{dy}{dx} \right|_b = \left. \frac{v}{u} \right|_b = \frac{q_{\infty} \left(\sin \alpha + \phi_{yb} \right)}{q_{\infty} \left(\cos \alpha + \phi_{xb} \right)} \quad (7)$$

In the inverse or separated flow region the pressure distribution along the effective displacement surface streamline is considered specified and used as the boundary condition. As shown in reference 2, this approach leads to a derivative boundary condition for the inverse region of the form

$$\phi_{xb} = -\cos \alpha + \left\{ \frac{1}{1 + \left(\frac{v}{u} \right)_b^2} \left[1 - \left[\left(1 + \frac{\gamma M_{\infty}^2 C_{pb}}{2} \right)^{\frac{\gamma-1}{\gamma}} - 1 \right] \frac{2}{(\gamma-1)M_{\infty}^2} \right] \right\}^{\frac{1}{2}} \quad (8)$$

Complete details concerning the finite difference scheme, the stretched Cartesian grid system, and the treatment of the boundary conditions are given in references 1, 2, and 4.

To include viscous effects, the basic approach is to calculate a boundary layer displacement thickness for the weak interaction regions and to use it to correct the location of the displacement surface (i.e., airfoil ordinate plus displacement thickness). For the strongly interacting separated zone on the upper surface, the pressure is determined from the interaction solution and the location of the displacement surface is computed by integrating the surface tangency condition, equation (7), with the initial conditions

specified by the displacement surface ordinates at the separation point, which is the interface between the two regions. The location and slopes of the displacement surfaces are updated regularly throughout the iterative solution.

In the present method, the laminar portion of the boundary layer is computed using a compressible Thwaites method similar to that used previously in TRANSEP⁶. The transition location is determined from a Granville type correlation¹⁶ based upon the difference between the local momentum thickness Reynolds number and the value at the laminar instability point combined with the pressure gradient history. Sometimes, particularly on the upper surface at high angles of attack, laminar separation is predicted upstream of the transition point. In these cases, the local momentum thickness Reynolds number is compared to an empirical correlation in order to determine if the laminar bubble is long or short. If the bubble is short, its length is assumed to be one horizontal delta-x grid width and the turbulent flow computation is initiated at the next downstream grid point. If the estimate indicates that the bubble is long, the calculation proceeds, but a warning is printed which indicates that the results are probably in error.

After transition, the turbulent boundary layer is computed using the simplified Kuhn and Nielson method (SKAN) as developed by Barnwell in reference 9. This method was selected because it is efficient, reliable, and yields excellent predictions of displacement thicknesses and separation point location. The SKAN turbulent boundary layer method solves the integral forms of the momentum equation, moment of momentum equation, and the derivative of the Coles' law-of-the-wall law-of-the wake relationship applied at the boundary layer edge. After considerable effort⁹, these equations can be transformed into a set of simultaneous ordinary differential equations, i.e.

$$a_{i1} \frac{du^*}{dx} + a_{i2} \frac{du_\beta}{dx} + a_{i3} \frac{d\delta}{dx} = b_i \frac{dU_e}{du_e} \frac{du_e}{dx} + \frac{a_\infty}{a_\infty} c_i \quad (9)$$

which can be solved for the wall friction velocity, u^* , the wake parameter u_β , and the boundary layer thickness δ , using a second-order predictor-corrector technique. The remaining quantities of interest such as displacement thickness and momentum thickness are then determined from these variables. The numerical integration is terminated at the separation point, where the wall friction velocity, u^* , vanishes.

The method uses a two-layer eddy-viscosity model which utilizes the Prandtl mixing length concept in the inner region and a Clauser model in the outer zone. In addition, the method assumes an adiabatic wall, ignores the

laminar sublayer, and approximates the intermittency factor as well as several density ratios appearing in the fundamental equations.

Thus, on the lower surface the flow is computed using direct boundary conditions (airfoil specified) including the effects of weak viscous interaction. On the upper surface, the flowfield is also computed directly with viscous interaction up to the separation point, which is determined as part of the boundary layer solution. Downstream of separation, inverse boundary conditions are utilized, and the pressure must be specified. Fortunately, if the skin friction at the wall is assumed to be zero in the separated zone, the SKAN formulation can be used to obtain a closed form solution for the velocity, and hence the pressure, at the outer edge of the separated zone. The resultant analytic expressions for the velocity and pressure are

$$\frac{u_e}{q_\infty} = \frac{5}{6} \frac{c_3^* \left[\cos \alpha (x_{TE} - x_{SEP}) + \phi_{TE} - \phi_{SEP} \right]}{\left\{ \left[1 + c_3^* (x_{TE} - x_{SEP}) \right]^{5/6} - 1 \right\} \left[1 + c_3^* (x - x_{SEP}) \right]^{1/2}} \quad (10)$$

$$C_P = \frac{2}{\gamma M_\infty^2} \left\{ 1 + \frac{\gamma - 1}{2} M_\infty^2 \left[1 - \frac{u_e^2}{q_\infty^2} \right]^{\frac{\gamma}{\gamma - 1}} - 1 \right\} \quad (11)$$

As can be seen, the separated pressure depends upon the flowfield solution via the inviscid perturbation potentials at the separation point and the trailing edge, the size of the separated zone, and (through c_3^*) the boundary layer solution at the separation point. In addition, this closed form solution predicts a variable pressure distribution for the separated region. At low freestream Mach numbers this variation is extremely small and is essentially constant. However, at freestream Mach numbers of 0.3 and above, the variation becomes significant and influences the resultant flowfield solution. This trend and the separated pressure variation is in accord with experimental observations and is a significant improvement over previous methods which assumed constant pressure in the separated zone regardless of the flow conditions. At low speeds the separated pressure is essentially constant and the complexity introduced by equations (10)-(11) may not be warranted. Thus, the present method contains the option of either using a constant pressure in the separated region or the variable distribution determined by the closed form solution given above.

In principle, the separated region and the wake should be accurately modeled with respect to physical phenomena and internal details. Consequently, several other investigators^{10,17-18} have attempted to develop

detailed descriptions of these regions. In the present model, however, the wake region contains very few computational points because the coordinate system rapidly stretches to infinity. Thus, the wake is assumed to be inviscid with a constant pressure trailing edge formed by the upper and lower displacement surfaces. Fortunately, extensive numerical experiments with the present and previous⁷ models indicate that the pressure distribution and aerodynamic coefficients are primarily dependent upon obtaining accurate predictions for the location of the separation point and the magnitude and variation of the separated pressure. Apparently, for many problems of interest the details of the wake region are of secondary importance. Since the present method obtains the separation point location directly from the solution for the wall friction velocity, u^* , and the pressure variation from a solution which couples the inviscid and viscous parts, it should yield reasonable engineering results.

INTERACTION AND ITERATION PROCEDURE

The iteration and interaction procedure used in TAMSEP is similar to that used in the low-speed program TRANSEP⁶ and is outlined in schematic form on figure 2. The program first reads all necessary input and initializes the perturbation potential at all grid points to zero. Next it computes transformation factors and coordinates associated with the stretched Cartesian grid for the initial grid specified by the input data. Included in this process is the computation of all airfoil ordinates and slopes required on the computational grid.

Since the initial grid is normally very coarse with a default size of 13x7, only fifty inviscid iterative cycles are computed on this grid. The calculation procedure used for the inviscid potential equation is the same iterative successive column over-relaxation scheme used in TRANDES^{1,4}. This limited number of cycles serves to rapidly create an approximate starting solution for succeeding grids. After these are completed, the grid is then halved and the solution interpolated onto a new grid, which has a default size of 25x13.

After obtaining all necessary coordinates, stretching factors, airfoil ordinates and slopes, etc., for this second grid, the method then performs fifty inviscid iterative cycles before considering any type of viscous interaction. Experience has shown that it is important to perform a limited number of inviscid cycles at the beginning of each new grid in order to eliminate any "problems" introduced by grid halving and interpolation.

After these initial iterations, the program then checks to see whether or not the user desires viscous interaction to be included by examining the value

of the variable ITACT. If viscous interaction is desired, which is specified by the ITACT default value of one, the program then checks to see if an initial laminar boundary layer is to be included (ILAM=1) or if the viscous calculations are to be for a turbulent boundary layer with user specified transition points (ILAM=0).

Upon completing the boundary layer computations for the current flowfield solution, the program then calculates the ordinates and slopes of the upper and lower displacement surfaces. Since it only involves weak viscous interaction, the lower surface computations are from the leading edge or the lower surface stagnation point, whichever is further aft, to the trailing edge. However, on the upper surface they are only from the leading edge to the separation point or to the trailing edge, whichever is less. This process involves smoothing of the displacement thickness values, properly adding them to the airfoil ordinates, and spline fitting the resulting points.

At this point the procedure depends upon whether or not separation has been detected on the upper surface. If separation does not exist prior to the last grid point on the airfoil upper surface, additional inviscid cycles are performed before returning to the viscous interaction loop. However, if separation is predicted, then the method must determine the pressure distribution and the location of the displacement surface in the separated zone.

Exactly how the separated pressure distribution is determined depends upon the user specified variable KSEP. If KSEP is zero, the pressure is assumed to be constant in the separated zone and is computed by

$$C_{P_{SEP}} = \frac{-2(\phi_{TE} - \phi_{SEP})}{x_{TE} - x_{SEP}} \quad (12)$$

While this expression is a small perturbation approximation for $C_{P_{SEP}}$, its usage has been found to be accurate and adequate for low speed incompressible flows. At freestream Mach numbers of 0.3 and higher, however, the variable separated pressure option, specified by a KSEP value of one, should be used. In this case, the pressure distribution along the displacement streamline in the separated region is determined by equations (10) and (11) above. Note that both approaches determine the separated zone pressure, which depends upon the current solution, by conditions at both the separation point and at the trailing edge and not just on conditions in the vicinity of separation. This result is in agreement with the conclusion of Gross¹⁹ that conditions at the downstream end of the separation zone partially influence the separation pressure level.

After determining the separated pressure distribution corresponding to the predicted separation point and the current potential flow solution, the corresponding upper surface displacement surface must also be computed for the separated zone. When separation exists, the previous method of adding the computed displacement thickness to the original airfoil ordinates is inappropriate since the values for displacement thickness predicted by the SKAN method are probably inaccurate in separated regions. Instead, the present approach is to solve, using the current potential flow solution, the differential equation

$$\left. \frac{dy}{dx} \right|_b = \left. \frac{v}{U} \right|_b = \frac{\sin \alpha + g_b \phi_{\eta b}}{\cos \alpha + f_b \phi_{\xi b}} \quad (13)$$

for the y-ordinates of the separated displacement surface as a function of x. Based upon previous studies^{2,6}, equation (13) is solved using the Runge-Kutta method of order four and the displacement surface ordinate at the separation point as the initial condition. In addition, in the process of solving this equation $\phi_{\xi b}$ and $\phi_{\eta b}$ must be evaluated by finite differences. While several formulations are possible², numerical studies indicate that accurate displacement surfaces are obtained using the following

$$\phi_{\eta b} = \frac{-3\phi_{i,j-1} + 4\phi_{ij} - \phi_{i,j+1}}{2\Delta\eta} + (\eta_b - \eta_{j-1}) \frac{\phi_{i,j-1} - 2\phi_{ij} + \phi_{i,j+1}}{\Delta\eta^2} \quad (14a)$$

$$\phi_{\xi b} = \frac{\phi_{i+1,j-1} - \phi_{i-1,j-1}}{2\Delta\xi} + (\eta_b - \eta_{j-1}) \frac{\phi_{i+1,j} - \phi_{i+1,j-1} - \phi_{i-1,j} + \phi_{i-1,j-1}}{2\Delta\xi\Delta\eta} \quad (14b)$$

In equations (14), the point (i,j-1) is the first ghost point below the displacement surface. Its value is determined as part of the inverse pressure boundary condition.

Since the present process is iterative and the potential solution uses the separated pressure distribution as an inverse boundary condition, the solution of equations (13) and (14) should yield upon convergence a separated zone displacement surface or free streamline that is compatible with the pressure distribution and potential flow solution.

At this point in the iteration-interaction procedure a check is made to see if the solution has converged or if the maximum number of iterations for a given grid size has been exceeded. If neither situation is true, ten more inviscid cycles with the new displacement surfaces and separated pressure

distribution are performed prior to repeating the viscous interaction loop. If, however, either condition is satisfied and the finest grid specified by the user has not been used, the grid is refined and the entire process shown on figure 2 is repeated. If the last grid solution has been obtained, then a final output is printed and the solution is finished.

It should be noted that the calculations on a given grid are stopped and assumed to be converged when the maximum perturbation potential change is less than some user specified value. However, when separation is present it is usual for the calculations on each grid to be terminated due to the number of iterative cycles exceeding a maximum user specified value (particularly on computers which only retain seven significant digits). In those cases, the existence or degree of convergence can be determined by examining the variation in the number of supersonic points, the location of separation, and the trailing edge ordinate of the upper displacement surface. All these values are printed out every ten iterative cycles. If they stabilize prior to the end of the computation on a given grid, then the results can be assumed to be converged. Normally, it is sufficient to perform 800 cycles on the coarse grid (25x13), 400 on the medium grid (49x25), and 400 on the fine grid (97x49), although occasionally more may be needed. In determining convergence, it should be remembered that the present method is supposed to obtain a steady state solution. At angles of attack above maximum lift, the actual flowfield about an airfoil is usually unsteady^{20,21}. In those cases, the present method probably will not converge and may enter some type of oscillatory behavior which appears to represent an unsteady flow pattern. However, the present method is not "time-accurate" and such results should only be viewed as indicative of the presence of significant unsteady phenomena.

USER INSTRUCTIONS

CODE DESCRIPTION

The TAMSEP code consists of a main program and eighteen subroutines. The subroutine and their relationships are shown in a subroutine tree on figure 3. The subroutine names and their functions are as follows:

FOIL	Reads in initial airfoil shape and determines ordinates and slopes at computational points.
VISACT	Computes turbulent boundary layer when viscous interaction included.
THWAIT	Computes the laminar boundary layer when viscous interaction included.
FIT2	Curve fit routine used by Thwaites method.
VALUE	Initializes the flowfield to zero perturbation potential.
SOLVE	Sets up the matrix coefficients used in the SLOR relaxation scheme.
PRESS	Computes the pressure distribution on the airfoil.
COORD	Sets up the coordinates in the computational and physical grids and computes the stretching factors.
FLOW1	Solves flowfield in front of the airfoil.
FLOW2	Solves flowfield in the direct region above and below the airfoil.
FLOW3	Solves flowfield in the inverse region.
WAKE	Solves the flowfield behind the airfoil.
SHAPE	Computes the shape of the airfoil displacement surface in the separated zone.
TRID	Tridiagonal equation solver.

HALVE Doubles the grid size and interpolates old values to obtain starting values on the new grid.

PLOT Creates a printer plot of the C_p and displacement surface.

ARC Determines the arc length of the airfoil coordinates and splines the coordinates versus arc length.

SPLINE Computes a cubic spline through a set of points.

BDLY Computes the turbulent boundary layer at the end of an inverse design calculation.

The TAMSEP code is written FORTRAN IV programming language and is designed for use on IBM, AMDAHL, CDC, DEC, and similar computers. In nonoverlay mode it requires less than 320,000 bytes on an Amdahl 470/V8. Using a FORTRAN H extended compiler at the optimization level two, it needs about 17 seconds for compilation and obtains a solution on a 97x49 grid in about 160 seconds at a rate of around 15,000 points/second. Some slight modification to formats, etc. may be required to run the program on different computer systems or under a FORTRAN 77 compiler.

INPUT DESCRIPTION

The input to the TAMSEP code is read in eight separate blocks. The first one contains a user supplied title, while the second and third blocks specify all the floating point and integer parameters needed to run the program. These parameters are input via namelists and if not specified are assigned default values by the program. Blocks four and seven are optional and are only included when the parameter IREAD is one. They read a non-zero perturbation potential starting solution and an initial airfoil description. Blocks five and eight are associated with input for the design option in the program and are only included when the parameter INV is one. Finally, block six contains the description of the airfoil under consideration. For an analysis computation, only blocks one, two, three and six would be included in the input stream.

DETAILED INPUT DESCRIPTION

Input Block 1: Title.

This block consists of a single line of input and is read by the main program.

NTITLE Description of case. Up to 80 alphanumeric characters. Appears on the printed output at the beginning of the results of each grid.

Input Block 2: Floating Point Parameters.

This block of input is read by the main program via a namelist called FINP.

M Freestream Mach number (real variable). Default 0.5

W Relaxation factor for subsonic points. Should be in the range $0 \leq W \leq 2.0$. Default 1.7

X1 X location where the direct mode calculation procedure stops. In the analysis mode it should be set to 0.5 (i.e. the trailing edge). In the inverse (design) mode it is usually set to slightly less than the third point from the leading edge or larger. Default 0.5

X2 End of the inverse region. For analysis cases set to a large number. In the inverse (design) case set to 0.5 (i.e. the trailing edge). Default 10000.0

ALP Angle of attack in degrees. Default 0.0

EPS Subsonic damping factor to match difference equations at sonic line if needed. Has no effect on the accuracy of the solution. Only affects stability and convergence rate. Normally it is not needed. Default 0.0

EPSS Supersonic damping factor for iterative stability. Has no effect on the accuracy of the converged solution, only on the stability and convergence rate. Should typically be about $M_{\max}^2 - 1$, where M_{\max} is the maximum local Mach number. Default 0.4

X4 The positive X locations where the coordinate stretching changes. It should be near the airfoil trailing edge. Default 0.49

S4 The positive psi value in the computational plane where the stretching changes. Default 2.0

CONV Convergence criteria control value. Iterations stop when the maximum change in the perturbation potential between relaxation cycles is less than CONV. Default 1.E-05

A1 Stretching constant for the Y direction. It can be used to control the Y and eta spacing near the horizontal axis. It is usually best to have the psi and eta spacing equal near the leading edge of the airfoil. Default 0.246

A2 First stretching constant for the X-direction. It is equivalent to $(2/\pi) (dx/d\xi)$ at $\xi = \xi_4$. The value of A2 determines the horizontal step size near the leading and trailing edges, i.e.

$$\Delta X_{x=x_4} = \frac{\pi A2}{2\Delta\xi} = \frac{\pi A2}{2} \frac{2(1+S4)}{(IMAX-1)}$$

See Appendix A of reference 4. Default 0.15

A3 Second stretching constant for the x-direction. It determines the physical location of the vertical grid line adjacent to the grid side edge. Default 3.87

RN Freestream Reynolds number based on chord length. Used only when viscous interaction (ITACT=1) included. Default 20E+06

XIBDLY The x-location at which upper surface transition is assumed to occur. The turbulent boundary layer calculation starts at the next grid point. The relationship to percent chord is:

$$XIBDLY = (\%chord - 50.0)/100.0$$

Used only if viscous interaction included (ITACT=1) and laminar boundary layer ignored (ILAM=0). Default -0.44

CIR Circulation about airfoil. If an initial solution is input (IREAD=1), it must be the corresponding value of circulation (CIR=CL/2.0). Default 0.0

CDCORR Correction to the wave drag coefficient. Because of the lack of a large number of points in the leading and trailing edge regions, the

wave drag coefficient has an error associated with grid size, spacing, and lift coefficient. The magnitude of CDCORR must be determined by the user by empirical methods. Note that the correction should be different for each airfoil and grid combination. Default 0.0

- RDEL Relaxation parameter for the boundary layer displacement thickness. It is used only when viscous interaction is included (ITACT=1) and IMAX is less than or equal to 55. Default 0.25
- RDELFN Fine grid relaxation parameter for the boundary layer displacement thickness. It is used only when viscous interaction is included and IMAX is greater than 55. Default 0.125
- SP Maximum value allowed for the Nash-Macdonald separation parameter when $x \leq XSEP$. Used only in the design case (INV=1) when computing the boundary layer over the design surface. Default 0.004
- XSEP X location after which the Nash-Macdonald separation parameter can exceed SP. Used only in the design case (INV=1) when computing the boundary layer over the design surface. Default 0.44
- RCPB Not used. Ignore.
- CPB Not used. Ignore.
- XMON Not used. Ignore.
- XPC Location after which the lower surface displacement thickness is required to continue decreasing once it has started to decrease. Upstream of XPC the displacement thickness is required to be monotonically increasing. For most aft-cambered airfoils it should be set to 0.1, and for conventional airfoils it should be set to 0.5. Default 0.1
- XLBDLY The x-location at which lower surface transition is assumed to occur. Same relationship to chord as XIBDLY. Used only if viscous interaction included (ITACT=1) and laminar boundary layer ignored (ILAM=0). Default -0.44

RLAX Relaxation parameter for the separated pressure level in the constant separated pressure option (KSEP=0). Sometimes needed to enhance convergence. Used only when ITACT=1, IMASS=1, and KSEP=0. Default 1.0

RADUS Leading edge radius of the airfoil nondimensionalized by the chord. Used only if ITACT=1 and ILAM=1. Default 0.0159

Input Block 3: Integer Parameters.

This block of input is read by the main program via a namelist called IINP.

IMAX Number of vertical grid lines in the horizontal direction on the first grid. I=1 corresponds to upstream infinity and I=IMAX corresponds to downstream infinity. For each grid refinement IMAX is increased such that the new IMAX is two times the old value minus one. The limit on IMAX is 99. Default 13

JMAX Number of horizontal grid lines in the vertical direction on the first grid. J=1 corresponds to infinity below the airfoil and J=JMAX is infinity above the airfoil. The same formula and limit that apply to IMAX also apply to JMAX. Default 7

IKASE An integer number describing the case being computed. It is limited to a maximum of six digits and is printed at the beginning of the pressure printer plot for each grid. Default 100

INV Parameter determining the program mode. It should be zero for analysis cases and one for inverse design cases. Default 0

MITER Maximum number of interactions (complete relaxation cycles) allowed on the first grid. MITER is halved for each grid refinement. However, on the fourth grid, MITER is reset to 400. Default 1600

NHALF Number of grid refinements. Default 2

ITACT Viscous interaction control parameter. It should be set to zero for analysis cases without interaction and for design cases. It should be one for analysis cases with interaction. Default 0

ISKP2 Airfoil update control parameter for grid two. It should be zero if an airfoil shape update is desired on grid two every ten iterations. It should be one if an update is not desired until grid two solution is completed. Only used in the inverse design mode (INV=1). Default 0

ISKP3 Same as ISKP2 but for grid 3

ISKP4 Same as ISKP2 but for grid 4

ITERP Interpolation parameter for the design pressure distribution on grid four. If in the design mode the input pressure distribution for grid four is to be read as input data, INTERP should be zero. If it is desired to linearly interpolate the pressure distribution of grid three, it should be one. Default 0

IREAD Starting solution control parameter. If IREAD is zero, the initial perturbation solution is assumed to be zero everywhere. If it is one, an initial solution is read as data. The latter would only normally occur when a user wished to restart a solution which had previously been saved. Default 0

LP Relaxation cycle interval at which boundary layer details are printed. For diagnostic purposes suggest 50 or 100. For normal information purposes, suggest a value of 200. Default 1000 (no printout)

IMASS Massive separation parameter. It should be one if the massive separation option is desired in analysis cases and is active only if ITACT is one. In inverse design cases (INV=1) it should be zero. Default 1

ILAM Boundary layer parameter. If zero, boundary layer is computed as if all turbulent with transition at XIBDLY and XLBDLY. If one, boundary layer is considered laminar-turbulent with natural transition. Default 1

IPRT1 Print parameter. If one, perturbation potential values printed at the completion of each grid. Default 0

- IPRT2 Print parameter. If one, x and y velocities at each grid point printed at the completion of each grid. Default 0
- KSEP Separated pressure distribution parameter. If zero, pressure in separated zone is assumed to be constant. If one, pressure in separated zone is considered variable. Default 1

Input Block 4: Starting Solution (Optional).

This block of data is read by subroutine VALUE only if the integer parameter IREAD has the value of one.

- P(I,J) Nondimensional perturbation potential at point I,J. Read by rows starting at J=JMAX down to J=1. Each row runs from I=1 to I=IMAX and starts on a new line. Format 5E15.7
- PB(I) Nondimensional perturbation potential at point I on the y=0 (i.e. J=JB) grid line that is associated with the lower surface of the airfoil. Read from I=1 to I=IMAX. Format 5E15.7

Input Block 5: Direct Inverse Parameters (Inverse Design Mode only)

This single line of input is read in subroutine COORD only when the inverse design mode is active (INV=1).

- X1,X2 Same definition as in Block 3. However, when the inverse design mode is active, these values are read prior to the solution of each grid. This block corresponds to the first grid; and, thus, should always use X1=0.5 and X2=10000.0. Format 2F10.5

Input Block 6: Airfoil Description

This block of data is read by subroutine FOIL and describes the airfoil used in the analysis mode or the starting airfoil for the inverse design mode.

- NI The number of coordinate pairs used to describe the upper surface of the airfoil. Maximum value limited to 99. Format I5

XI(I),YI(I) Coordinate pairs describing the upper surface of the airfoil. The leading edge corresponds to XI=0.0 and the trailing edge is XI=1.0. The vertical ordinate, YI, is nondimensionalized by chord. Read starting with I=1 to I=NI. Format 8F10.4

DERIX,DERIY,DERFX,DERFY Parameters describing the leading and trailing edge of the airfoil. DERIX is dx/ds of the airfoil upper surface at the leading edge. It is usually zero. DERIY is dy/ds of the airfoil upper surface at the leading edge and it is usually 1.0. DERFX is d^3x/ds^3 of the airfoil upper surface at the trailing edge. It is usually sufficiently accurate to use 0.0. DERFY is d^3y/ds^3 of the airfoil upper surface at the trailing edge. It is usually sufficiently accurate to use 0.0. Format 4F10.4

NIB The number of coordinate pairs used to describe the lower surface of the airfoil. Maximum value limited to 99. Format I5

XIB(I),YIB(I) Coordinate pairs describing the lower surface of the airfoil. The leading edge corresponds to XI=0.0 and the trailing edge is XI=1.0. The vertical ordinate, YIP, is nondimensionalized by the chord. Read starting with I=1 to I=NIB. Format 8F10.4

DERIXB,DERIYB,DERFXB,DERFYB Parameters describing the leading and trailing edge of the airfoil. DERIXB is dx/ds of the airfoil lower surface at the leading edge. It is usually zero. DERIYB is dy/ds of the airfoil lower surface at the leading edge and it is usually -1.0. DERFXB is d^3x/ds^3 of the airfoil lower surface at the trailing edge. It is usually sufficiently accurate to use 0.0. DERFYB is d^3y/ds^3 of the airfoil lower surface at the trailing edge. It is usually sufficiently accurate to use 0.0. Format 4F10.4

Input Block 7: Starting Airfoil Description (Optional)

This block of data is read from subroutine FOIL and is only read if the integer input parameter IREAD is one. It effectively overwrites the information from input block six.

YU(I),YL(I),SLU(I),SLL(I) Values describing the airfoil on the starting grid. YU(I) and YL(I) are the upper and lower surface ordinates, nondimensionalized by chord, at chord location X(I). SLU(I) and

SLL(I) are the upper and lower surface slopes at chord location X(I). The X(I) values depend upon the size and spacing associated with the starting grid. The group of four values is read starting at the I value corresponding to the first point downstream of the leading edge (I=ILE) and ending with the point just upstream of the trailing edge (I=ITE). Format 5E15.7

DUPOLD(I),DLWOLD(I) Values describing the boundary layer displacement thickness on the starting grid. DUPOLD(I) and DLWOLD(I) are the upper and lower surface displacement thicknesses corresponding to the chord location X(I). These are read starting at the I value corresponding to the first point downstream of the leading edge (I=ILE) and ending with the point just upstream of the trailing edge (I=ITE). Format 5E15.7

Input Block 8: Design Pressure Distribution (Inverse Design Mode only)

This block of data consists of four sections which are only included in the inverse design mode (INV=1). In that mode only the last three sections would usually be included.

Section 1.- Starting solution design pressure distribution read by subroutine FOIL. This section would only be included if a design solution were being restarted (i.e. INV=1, IREAD=1, and MHALF=1) and it would only affect the first grid considered.

CPU(I) Upper surface inverse region pressure coefficient values for the design case starting with I=I1, which is the first grid point after X1 and ending with I=ITE, the grid point just upstream of the trailing edge. Format 8E10.3

CPL(I) Lower surface inverse region pressure coefficient values for the design case starting with I=I1, which is the first grid point after X1 and ending with I=ITE, the grid point just upstream of the trailing edge. Format 8E10.3

Section 2.- This section reads in the starting and ending points of the inverse region from subroutine COORD and the inverse design pressure distribution from subroutine FOIL for the second grid. Used only in the inverse design case (INV=1).

X1,X2 X1 is the location where the direct calculation stops and the inverse calculation begins. Typically, it is slightly less than the third point from the leading edge or larger. X2 is the location where the inverse calculation stops. It should always be set to 0.5. Format 2F10.5

CPU(I) Upper surface inverse region pressure coefficient values for the design case starting with I=I1, which is the first grid point after X1 and ending with I=ITE, the grid point just upstream of the trailing edge. Format 8E10.3

CPL(I) Lower surface inverse region pressure coefficient values for the design case starting with I=I1, which is the first grid point after X1 and ending with I=ITE, the grid point just upstream of the trailing edge. Format 8E10.3

Section 3.- This section reads in the starting and ending points of the inverse region from subroutine COORD and the inverse design pressure distribution from subroutine FOIL for the third grid. Used only in the inverse design case (INV=1). The input variables and descriptions are the same as Section 2 above.

Section 4.- This section reads in the starting and ending points of the inverse region from subroutine COORD and the inverse design pressure distribution from subroutine FOIL for the fourth grid. Used only in the inverse design case (INV=1) when ITERP is zero. Note that in references 2 and 4, the use of grid four for inverse design is not recommended. The input variables and descriptions are the same as Section 2 above.

OUTPUT DESCRIPTION

The printed output when the program is operated in the inverse design mode is identical to that described in reference 4. When the program is operated in the analysis mode with the massive separation option, the output for grids two, three, and four has the form shown below. Since the first grid assumes inviscid flow only, its printout only includes those portions associated with an inviscid solution.

1. Heading (user supplied)
2. Case Number
3. Mach number and angle of attack
4. Case type callouts, i.e.,

INVISCID ANALYSIS CASE
WITH LAMINAR TURBULENT VISCOUS INTERACTION
AND MASSIVE SEPARATION
AND VARIABLE PRESSURE IN SEPARATED REGION

5. Input data in namelists FINP and IINP
6. Coordinate System for current grid printed as I,X(I) followed by J, Y(J)
7. Ordinates of the current airfoil displacement surface

X--Horizontal ordinate, where -0.5 is the leading edge and 0.5 is the trailing edge.

YU--Upper displacement surface ordinate

YL--Lower displacement surface ordinate

UPPER SLOPE--Slope of upper displacement surface

LOWER SLOPE--Slope of lower displacement surface

8. Iteration history at ten-cycle intervals

CIR--Circulation

DPM--Maximum ϕ correction (absolute value) in the last relaxation cycle with the corresponding (I,J) grid location.

NSSP--Number of supersonic grid points

DELTAY OR YUTE--In the design case, the change in YU(ITE), the upper surface trailing edge ordinate, since the last surface update. Should go to zero if converging. In the viscous analysis case, it is the current value of YU(ITE); and it should approach a constant value if the solution is converging. Only changes after the first fifty cycles on each grid.

SEP AT X--The current x ordinate value for the upper surface separation point (x = -0.5 is the leading edge and x = 0.5 is the trailing edge).

9. Boundary Layer Information

Every LP cycles results of the current boundary layer solution are printed first for the lower surface of the airfoil and then for the upper surface. In each case, the laminar solution (if ILAM=1) is printed first followed by the turbulent solution.

9a. Laminar Boundary Layer Information (Printed every LP cycles)

X--Horizontal ordinate

MACH #--Local Mach Number

CF--Skin friction coefficient (the 0.1E11 initial value is arbitrary and should be ignored)

D-STAR-- δ^*/c , non-dimensional boundary layer displacement thickness

D-THETA-- θ/c , non-dimensional momentum thickness

H-- δ^*/θ , shape factor

RE-THETA--Local Reynolds number based on θ

RE-STAR--Local Reynolds number based on δ^*

TM-- $\theta(du/dx)/\nu$, Pressure gradient parameter

9b. Possible Laminar Boundary Layer Messages

1. SEPARATION OCCURRED AT $X = 0.xxx$ -- gives x location where laminar separation occurred.
2. SHORT BUBBLE FORMED? TRANSITION TO TURBULENT FLOW ASSUMED, $X = 0.xxx$
3. LONG BUBBLE? LAMINAR STALL MAY OCCUR, $X = 0.xxx$ BOUNDARY LAYER CALCULATION WILL BE CONTINUED AS TURBULENT BUT ACCURACY OF RESULTS IS QUESTIONABLE
4. BOUNDARY LAYER CALCULATION COMPLETED? NEITHER SEPARATION FOR TRANSITION WAS DETECTED

9c. Turbulent Boundary Layer Information (Printed every LP cycles)

X--Horizontal ordinate (-0.5 is leading edge, 0.5 is trailing edge)

MACH #--Local Mach number

DLSTR-- δ^*/c , non-dimensional boundary layer displacement thickness

DEL-- δ^*/c , non-dimensional boundary layer thicknesses

CUE-- U_e , transformed boundary layer edge velocity, $U = (a_\infty/a_e)u$

USTAR--Law of the wall parameter, $\text{SQRT}(\tau_w/\rho)$

USTAR**2--Skin friction parameter, (τ_w/ρ)

THETA-- θ/c , non-dimensional momentum thickness

CDP--Profile drag coefficient using Squire-Young approach modified according to reference 9

CDW--Wave drag coefficient, not computed in this version of code and thus always zero

CDTOT--Total drag coefficient

9d. Possible Turbulent Boundary Layer Messages

1. SEPARATED CP IS 0.xxx -- In the constant separated pressure level option (IMASS=1,ITACT=1,KSEP=0) the pressure in the separated region is printed after each boundary layer calculation. If solution is converging, it should approach a constant value.
2. USTAR2 (or USTCK) LT ZERO -- Indicates where in computation separation was first detected. See program listing for details.

10. Final Boundary Layer Results

YUORIG -- Original airfoil upper surface ordinate

DU -- Smoothed upper surface displacement thickness

SLU -- Slope of upper displacement surface

YLORIG -- Original airfoil lower surface ordinates

DL -- Smoothed lower surface displacement thickness

SLL -- Slope of lower displacement surface

11. Pressure Distribution on Airfoil

CPU -- Upper surface pressure coefficient

CPL -- Lower surface pressure coefficient

12. Final Displacement Surface Information

YU -- Ordinate of upper displacement surface

YL -- Ordinate of lower displacement surface

SLU -- Slope of upper displacement surface

SLL -- Slope of lower displacement surface

13. Mach Chart

The Mach numbers at the I,J coordinate points are multiplied by 100 and printed out in block form. The grid points "inside" the upper and lower displacement surfaces are indicated by zeros. Velocities (U,V) at the flowfield grid points may also be printed out using option IPRT2=1.

14. Miscellaneous Information

The normal force coefficient, CN, and the drag coefficient, WAVE CD, obtained by integration of the pressure distribution are printed out. The latter should theoretically be zero for subcritical unseparated cases, but it usually is non-zero due to mesh size and grid placement. Thus values of WAVE CD should only be used for comparison purposes.

15. Printer Plot of Results

U -- Upper surface pressure coefficient

L -- Lower surface pressure coefficient

T -- Upper displacement surface

B -- Lower displacement surface

CPSTAR -- Pressure coefficient for local Mach number of one

CLCIR -- Lift coefficient from computed circulation

CL -- Lift coefficient from integration of pressure distribution

CD -- Wave drag plus profile drag coefficient (accuracy depends upon value of CDWAVE)

CMLE -- Moment coefficient about the leading edge

CDF -- Profile drag coefficient using Squire-Young approach modified
for separation and compressibility

CMC4 -- Moment coefficient about quarter chord point

16. Miscellaneous Messages

PROD .LE. ZERO

This message indicates that the turbulent boundary calculation was unable to obtain an appropriate starting solution. As a result the flowfield calculations were continued with the displacement surface ordinates and slopes frozen at their last updated values. This situation usually occurs when transition takes place at the shock wave and the local Mach number immediately upstream of the shock wave is greater than 1.35. It probably indicates that at a minimum there is local separation in the vicinity of the shock wave. Since this phenomenon is not modeled in the present code the results obtained in such cases should be used carefully. Sometimes this problem can be "avoided" by computing an all turbulent case (ILAM=0) with transition at or immediately upstream of the shock wave. It should be noted that when this message appears, the subsequent computed values of CDF are in error.

AA .LT. ZERO

This message occurs when the local speed of sound is computed to be negative. It indicates that either the solution has become unstable or else the rotated scheme tried to use a point outside of the solution domain due to a supersonic point on the JMAX-1 row. Usual solution is to increase the supersonic damping, EPSS, and/or increase the stretching and/or size of the Y grid. When encountered, the computation is terminated and the current perturbation flowfield solution is printed for diagnostic purposes.

17. Additional Output

Note that additional output can be obtained for either diagnostic or analysis purposes by removing the C's from various commented print statements in the program.

TYPICAL RESULTS

In the development of the present method, results have been obtained for NACA 4412 and NACA 0012 airfoils for freestream Mach numbers up to 0.6, angles of attack up to 18.5 degrees, and Reynolds numbers between three and nine million. These conditions were selected not because of limitations in the method but due to the availability of excellent experimental pressure distribution data in those regions²²⁻²³. Thus, the results presented here are only meant to be representative.

Figure 4 and 5 compare results obtained with the present method with the low speed experimental data of Pinkerton²³ for a NACA 4412 airfoil at 6.3 million Reynolds number. In figure 4 the experimental data have been plotted using the angle-of-attack correction suggested in reference 22. As can be seen, the theory predicts slightly larger lift coefficients than the data at the lower angles-of-attack. Whether this difference is due to an underestimation of the angle of attack correction, as suggested in reference 24, or a problem in the theoretical model is unknown. In any event, the theory and the data are in excellent agreement between ten and fifteen degrees; and the present model reasonably predicts the location of maximum lift at an angle of attack of about 16 to 17 degrees. The theoretical model does, however, overpredict slightly (1.8 vs. 1.7) the maximum lift coefficient predicted by this forty- seven year old data.

Figure 5 compares pressure distribution results obtained with the present method with the experimental data of Pinkerton at an angle of attack slightly below that corresponding to maximum lift. In this case, the corrected angle of attack was used in the computation, and the upper and lower surface boundary layers were assumed to be initially laminar followed by natural transition to turbulent flow. For this high lift case, the theory predicts that the lower surface remains entirely laminar and that the upper surface transitions at one percent chord followed by separation at 74.9 percent chord. As can be seen on the figure, the predicted pressure distribution is in excellent agreement with the data; and the pressure coefficient in the separated zone is slightly negative and constant. Experience indicates that for low speed cases better results are usually obtained using the constant pressure option (KSEP=0) for the separated zone. For this case, the theoretical lift coefficient was 1.69 while the experimental value was 1.68. The predicted profile drag coefficient was 0.0200, which is in reasonable agreement with available measurements²⁵.

As indicated previously, it is important for this type of method to include the effects of a laminar boundary layer. Figure 6 shows lower surface

laminar-turbulent transition point locations predicted by the present method for a NACA 0012 airfoil at Mach 0.3 and six million Reynolds number. As can be seen, for these flight conditions the lower surface boundary layer is predominantly laminar at low angles of attack; and at angles of attack above ten degrees it is essentially all laminar. Obviously, a method which only includes a turbulent boundary layer calculation and/or assumes transition near the leading edge might yield incorrect results for these flight conditions.

Figure 6 also shows for the same conditions the predicted upper surface separation points determined by the TAMSEP method. Notice that no significant upper surface separation is predicted until about 12 degrees angle-of-attack. After that, as the angle of attack increases, the beginning of separation moves forward on the upper surface until more than half of the airfoil experiences separated flow at about 16 degrees. For this case, maximum lift occurs around 14 degrees.

The experimental data from the Low Turbulence Pressure Tunnel which are presented in figures 7, 8, and 9 were obtained from Mr. C. L. Ladson of the NASA Langley Research Center in Hampton, Virginia. Figure 7 compares the predicted lift coefficient variation with angle of attack for a NACA 0012 airfoil at the same nominal conditions (i.e. Mach 0.3 and six million Reynolds number) with experimental data obtained in the Low Turbulence Pressure Tunnel at NASA Langley. These data were obtained on clean airfoils without the use of trip strips, and thus the theoretical results were obtained using the laminar natural-transition turbulent model (ILAM=1). At the lower angles of attack the agreement is quite good. However, at the onset of trailing edge separation, around twelve degrees, the theoretical lift curve exhibits a "kink" accompanied by a slight decrease in lift coefficient. This "kink" is often observed in the theoretical lift curve when separation is first predicted and is due to the fact that separation is usually first detected on the coarse grid. On that grid, the first point forward of the trailing edge is about 93% chord; and, thus, when separation is first predicted on the coarse grid the separation point moves forward from the trailing edge to at least the 93 percent point, with the result that the amount of separation is overpredicted and the lift at that condition is underpredicted. Since the model only permits the separation point to move forward, this effect is maintained throughout all the grids at that angle of attack. However, as the angle of attack is increased this effect disappears. Thus, at low and medium freestream Mach numbers, the lift coefficients predicted at angles of attack just above the onset of trailing edge separation are usually slightly low.

As can be seen on figure 7, the lift coefficients predicted at the higher angles of attack are, at least for this case, in reasonable agreement with the

experimental data. Notice that for this case the experimental data indicate an apparent maximum lift around 14 degrees followed by a decrease and then an increase. The theoretical lift based upon the calculated circulation predicts a maximum lift coefficient of about 1.40 at 14 to 16 degrees. On the other hand, the theoretical lift based upon integration of the pressure distributions indicates a maximum lift at 14 degrees, which nominally agrees with experimental data. This slight divergence between the values predicted by circulation and those by pressure integration is, based upon experience, an excellent indication of the maximum lift location at low and medium speeds. The reason for this statement will be evident when the pressure distributions for these cases are discussed.

The predicted variation of drag with lift for this case is compared to experimental data at the higher lift coefficients on figure 8. Again the zig-zag in the theoretical curve corresponds to the similar phenomena on the lift versus angles-of-attack plot and is due to the overprediction of the size of the initial separated zone. Nevertheless, the agreement between the theoretical predictions and experimental values, particularly near maximum lift, is good and should be acceptable for applied engineering calculations.

Figures 9(a-c) compare pressure distributions obtained with the present method with data obtained by Ladson in the Low Turbulence Pressure Tunnel at three different angles of attack. The first corresponds to an unseparated flow situation, the second is near maximum lift, and the third is for an angle of attack above the maximum lift condition. Since evidence^{9,22} at medium freestream Mach numbers and higher indicates that the pressure variation in a separated zone is not constant, these and subsequent cases were all run using the variable pressure option (KSEP=1). As can be seen on figure 9(a) the theoretical pressure distribution for the unseparated case is in excellent agreement with experimental data. For this case, the theoretical lift and drag coefficients were 1.27 and 0.0116 while the corresponding clean airfoil experimental values were 1.23 and 0.0123.

For the case near maximum lift, figure 9(b), it should be noted that some supersonic flow exists over the upper surface of the airfoil in a very small region near the leading edge since the critical C_p for this case is -6.89. In addition, the theoretical method predicts upper surface separation at 74.9 percent chord and boundary layer instability on the lower surface at about 80 percent chord. However, due to the favorable pressure gradient, the lower surface boundary layer never transitions. For this case the theoretical lift coefficient of 1.39 coincides with the experimentally measured value, and the two pressure distributions exhibit reasonable agreement.

At an angle of attack greater than that corresponding to maximum lift, the flow about an airfoil is typically characterized by a large region of unsteady separated flow; and a steady state solution method such as the present one is not really applicable. Thus, the apparent lack of agreement between the present steady theory and the experimental measurements shown on figure 9(c) is not surprising. Nevertheless, the general pattern of the pressure distribution including the existence of a large separation zone is predicted; and the predicted lift coefficient of 1.44 based upon circulation is in surprising agreement with the experimentally measured values of 1.437. However, careful examination of the solution indicates that it is not completely converged, that the theoretical lift may be oscillating slightly, and that the lift based upon pressure integration computed at the end of a run using default parameters is only 1.27. Interestingly, results using the thin layer Navier Stokes equations^{20,21} for a similar case (NACA 0012, Mach No. = 0.3, Reynolds = 1 million, angle of attack = 18 degrees) indicate a lift coefficient varying with time from 0.65 to 1.6 with a Strouhal number of 0.1; and both the theoretical and experimental pressure profiles shown on figure 9(c) are representative of those computed at various times in the cycle with the thin layer Navier Stokes model. Thus, the present theoretical result is representative of the type of pressure distribution and lift which might exist for this condition.

Another interesting feature associated with the results shown on figure 9(c) is that the drag coefficient predicted using the method of reference 6 (i.e. CDF) was 0.0604 while that predicted using the method of reference 9 (i.e. CDP) was 0.1190. Normally, these two values are in good agreement with each other. Apparently, in the present method when the maximum lift condition is exceeded the solution becomes oscillatory and not completely converged, the lift computed by pressure integration diverges from and is lower than that from circulation, and the CDF and CDP values differ significantly. It is believed that these three items can be used to determine for medium Mach numbers the angle of attack corresponding to maximum lift.

Figure 10 shows for the same NACA 0012, Mach 0.3, Reynolds number 6 million case, the displacement surfaces predicted by the present method for the upper surface region between 70 percent chord and the trailing edge at various angles of attack. Below 11.13 degrees, where the flow is unseparated, the displacement thicknesses in the trailing edge zone are relatively small. However, with the onset of separation at 12.09 degrees the thicknesses begin to increase rapidly, and the displacement surfaces take on shapes characteristic of the flow over a stalled airfoil. It should be noticed that at an angle of attack of 16.12 degrees, the displacement surface starts to

curve back towards the freestream angle prior to the trailing edge. It is believed that the displacement surfaces shown on this figure have the correct behavior and are an adequate engineering representation of the real flow.

Obviously, it would be desirable for the present method to accurately model transonic flows with and without significant trailing edge separation. Consequently, predictions obtained with TAMSEP have been compared with data obtained in the NASA 8 Ft. Transonic Pressure Tunnel by Harris²². These data probably represent the best high lift transonic experimental airfoil data available today, and it has been used by many investigators. However, in most cases previous studies have compared results using the tunnel geometric angle-of-attack values and have ignored the known corrections associated with these data. Since such comparisons could lead to erroneous conclusions, the present results were obtained by matching the tunnel Mach and Reynolds numbers and using the corrected angles of attack suggested by Harris.

Figure 11 shows a transonic separated flow result compared with data obtained by Harris²². While the pressure distribution shown was obtained using the laminar-turbulent boundary layer option, indistinguishable results were obtained assuming transition at 6 percent chord. In the actual experiment, boundary layer trip strips were located at 5 percent chord. For this case, the present method predicts upper surface separation at 87 percent chord and lower surface transition very near the trailing edge. While the experimental shock location is slightly forward of the theoretical value and while the experimental pressures in the trailing edge region are slightly lower than those predicted by the theory, the overall agreement is probably acceptable for engineering studies. For this case, the measured normal force coefficient was 0.994 while the predicted lift coefficient was 0.981.

A lift versus angle-of-attack curve typical of those predicted by the present method is compared with experimental data on figure 12. For this freestream Mach number of 0.5, significant transonic flow accompanied by a strong shock wave is present on the upper surface at angles of attack greater than 6 degrees. As can be seen, the theoretical prediction, which was obtained assuming transition at 6 percent chord, agrees well with the experimental data up to about 7.35 degrees. Above that angle of attack, the present method predicts a maximum lift coefficient of 1.09 at 8.24 degrees with no trailing edge separation. At 9.21 degrees the theory predicts a decrease in lift coefficient to 0.982 with upper surface separation at 87 percent chord. The experimental data, however, indicates that maximum lift is 1.02 at 9.21 degrees and that trailing edge separation probably started at about 7.5 degrees. Examination of the theoretical results at 7.35 degrees reveals that the local Mach number immediately upstream of the upper surface

shock wave is 1.42. Such a strong shock wave, whose strength increases with angle of attack, should induce significant shock boundary layer interaction which, unfortunately, is not modeled in the present theory and code. Therefore, in this case the differences between the theoretical results and the experimental data near maximum lift are probably due to shock boundary layer interaction and its subsequent effect on boundary layer growth and trailing edge separation. Nevertheless, the present model and code does give a reasonable indication of the location and magnitude of the maximum lift coefficient.

A similar lift curve for a freestream Mach number of 0.55 is shown on figure 13. As before, the theoretical results were obtained using an all turbulent boundary layer; and in this case no upper surface trailing edge separation was detected until an angle-of-attack of 8.266 degrees. The maximum lift coefficient was computed to be 1.02 at 7.29 degrees as compared to the experimental values of 0.983 and 8.266 degrees. For this case significant transonic flow existed at all angles-of-attack above 4.5 degrees and by 7.29 degrees the Mach number at the upper surface shock wave had increased to 1.50. At 9.33 degrees a complete solution could not be obtained with the present method. On the medium grid the upper surface flow separated at 87 percent chord, and on the fine grid the separation point moved forward to the shock wave at about 18 percent chord and the solution failed. Quite obviously significant shock boundary layer interaction exists at these high angles of attack and the decrease in lift or stall is probably due more to shock induced separation than to the onset of significant trailing edge separation.

Nevertheless, the present method can be used to estimate reasonably accurately the occurrence of this situation. As can be seen on figure 13, the method predicts reasonably well the magnitude of the maximum lift coefficient and is conservative as to the corresponding angle-of-attack location. In addition, by noting the mechanism of code "failure", in this case sudden separation at the shock wave, a user can probably determine the type of stall phenomena present.

Theoretical pressure distribution results are compared with experimental data for a freestream Mach number 0.6 case in figure 14. This case at a corrected angle of attack of 5.59 degrees and three million Reynolds number is significant for a variety of reasons. First, it is an example of a transonic case with a strong upper surface shock wave. Second, the flow is unseparated and the data should serve as a good test of the present method for a situation

without separation. Finally, this case has also been solved by Anderson et al.²⁰ using both an Euler boundary layer method and a thin layer Navier Stokes method.

It should be noticed that the present results, like those of Anderson, agree very well with the experimental pressure distribution with respect to shock location and pressure levels. Also, for this case the experimental lift coefficient was 0.781. The present TAMSEP method predicted 0.809, the Euler boundary layer method of Anderson yielded 0.804, while his thin layer Navier Stokes result was 0.793. Obviously, the present method is capable of yielding excellent results that are in agreement with experimental data and other analytical methods. However, since it is a non-conservative full potential method, it should obtain such results with accurate shock wave locations more easily and faster than other more complicated methods.

Another lift versus angle-of-attack comparison is shown on figure 15 for the NACA 0012 at a freestream Mach number of 0.6 and a Reynolds number of nine million. As can be seen the highest theoretical point plotted is at a lift coefficient value of 0.945 and an angle of attack of 6.392 degrees. At 7.348 degrees the boundary layer solution became frozen (i.e. PROD.LE.ZERO) on the medium grid due to shock boundary layer interaction, and on the fine grid the flow separated at the shock wave and a converged solution was not obtained. At 8.371 degrees the flow separated at the upper surface shock wave on the coarse grid, and again a converged solution was not obtained. For these cases, computed local Mach numbers in the vicinity of the shock wave were as high as 1.56. Thus, the theory indicates that above 6.392 degrees significant shock boundary layer interaction probably accompanied by separation exists and that the maximum lift coefficient occurs at that angle-of-attack. As can be seen on the figure, the magnitude of the predicted maximum lift coefficient is in good agreement with the experimental data; although the angle-of-attack location is again conservative.

Based upon the results presented in this section, it is believed that the present method and code can be used at low and medium Mach numbers to accurately predict lift and pressure distributions at angles of attack up to that associated with maximum lift. At transonic speeds, the method should give good results for unseparated flows and for flows having trailing edge separation without significant shock boundary layer interaction. Thus, at transonic conditions, the method is probably currently limited, for accurate results, to Reynolds numbers of three million and higher and to local upper surface Mach numbers less than 1.4 to 1.45. In addition, it should yield reasonable estimates for the maximum lift coefficient at transonic speeds while being conservative as to the corresponding value of angle of attack; and

the method should indicate the onset of significant shock boundary layer interaction.

CONCLUSIONS

A direct-inverse technique based upon a nonconservative full potential inviscid method, a Thwaites laminar boundary layer technique, and the Barnwell turbulent momentum integral method has been developed. This method is suitable for predicting the subsonic and transonic flowfield about airfoils having trailing edge separated flow. Extensive comparisons with experimental data indicate that the method should be a useful tool for applied aerodynamic engineering analyses. In addition, it is believed that the range of applicability of the method could be extended significantly by the addition of a shock boundary layer interaction mode.

REFERENCES

1. Carlson, L. A., "Transonic Airfoil Flowfield Analysis Using Cartesian Coordinates," NASA CR-2577, August 1975.
2. Carlson, L. A., "Transonic Airfoil Design Using Cartesian Coordinates," NASA CR-2578, April 1976.
3. Bauer, F., Garabedian, P., Korn, D., and Jameson, A., Supercritical Wing Sections II, New York, Springer-Verlag, 1975.
4. Carlson, L. A., "TRANDES: A FORTRAN Program for Transonic Airfoil Analysis or Design," NASA CR-2821, June 1977.
5. Barnwell, R. W., "Two Inviscid Computational Simulations of Separated Flow about Airfoils", AIAA Paper 76-379, July 1976.
6. Carlson, L. A., "TRANSEP: A Program for High Lift Separated Flow about Airfoils," NASA CR-3376, December 1980.
7. Carlson, L.A., "A Direct-Inverse Technique for Low Speed High Lift Airfoil Flowfield Analysis," AGARD CP-291, pp. 26-1 -- 26-10, February 1981.
8. Blascovich, J. D., "Characteristics of Separated Flow Airfoil Analysis Methods," AIAA Paper 84-0048, January 1984.
9. Barnwell, R. W., "A Potential-Flow/Boundary-Layer Method for Calculating Subsonic and Transonic Airfoil Flow With Trailing-Edge Separation," NASA TM-81850, June 1981.
10. Dvorak, F. A. and Choi, D. H., "Separation Model for Two-Dimensional Airfoils in Transonic Flow," AIAA Journal, Vol. 22, No. 8, August 1984, pp. 1064-1070.
11. Taverna, F., "Prediction of Subsonic/Transonic Separated Flow About Airfoils," AIAA Paper 85-0205, January 1985.
12. Rizzi, A. and Viviani, H., editors, Numerical Methods for the Computation of Inviscid Transonic Flows with Shock Waves, Vieweg, 1981.

13. Salas, M. D. and Bumber, C. R., "Breakdown of the Conservative Potential Equation," AIAA Paper 85-0367, January 1985.
14. Ludford, G. S. S., "The Behavior at Infinity of the Potential Function of a Two-Dimensional Subsonic Compressible Flow," Journal of Mathematical Physics, Vol. 30, No. 3, October 1951, pp. 117-130.
15. Klunker, E. B., "Contribution to Methods for Calculating the Flow about Thin Lifting Wings at Transonic Speeds -- Analytic Expressions for the Far Field," NASA TN D-6530, November 1971.
16. Schlichting, H., Boundary Layer Theory, 6th ed., New York, McGraw-Hill, 1968, p. 479.
17. Maskew, B. and Dvorak, F. A., "Investigation of Separation Models for the Prediction of CLmax, AHS Paper 77-33-01, May 1977.
18. Henderson, M. L., "A Solution to the 2-D Separated Wake Modeling Problem and Its Use to Predict CLmax of Arbitrary Airfoil Sections," AIAA Paper No. 78-156, January 1978.
19. Gross, L. W., "The Prediction of Two-Dimensional Airfoil Stall Progression," AIAA Paper 78-155, January 1978.
20. Anderson, W. K., Thomas, J. L., and Rumsey, C. L., "Application of Thin-Layer Navier-Stokes Equations Near Maximum Lift," AIAA 84-0049, January 1984.
21. Rumsey, C. L., "Time-Dependent Navier-Stokes Computations of Separated Flows Over Airfoils", AIAA-85-1684, July 1985.
22. Harris, C. D., "Two-Dimensional Aerodynamic Characteristics of the NACA 0012 Airfoil in the Langley 8-Foot Transonic Pressure Tunnel," NASA TM-81927, April 1981.
23. Pinkerton, R. M., "The Variation with Reynolds Number of Pressure Distribution over an Airfoil Section," NACA Report 613, 1938.

24. Coles, D. and Wadcock, A., "A Flying-Hot-Wire Study of Two-Dimensional Mean Flow Past an NACA 4412 Airfoil at Maximum Lift," AIAA 78-1196, July 1978.
25. Abbot, I. H. and Von Doenhoff, A. E., Theory of Wing Sections, Dover, New York, 1959, p. 489.

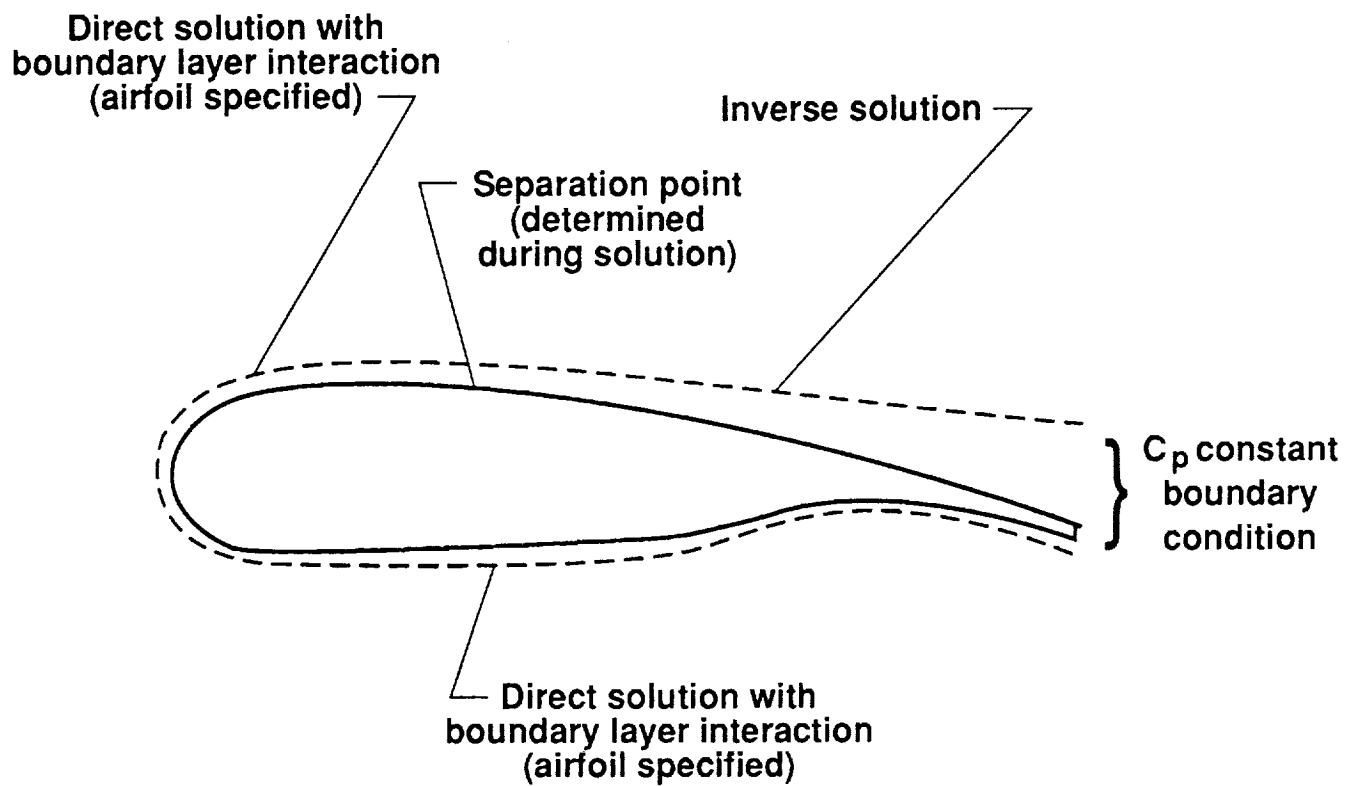


Figure 1.- Problem formulation.

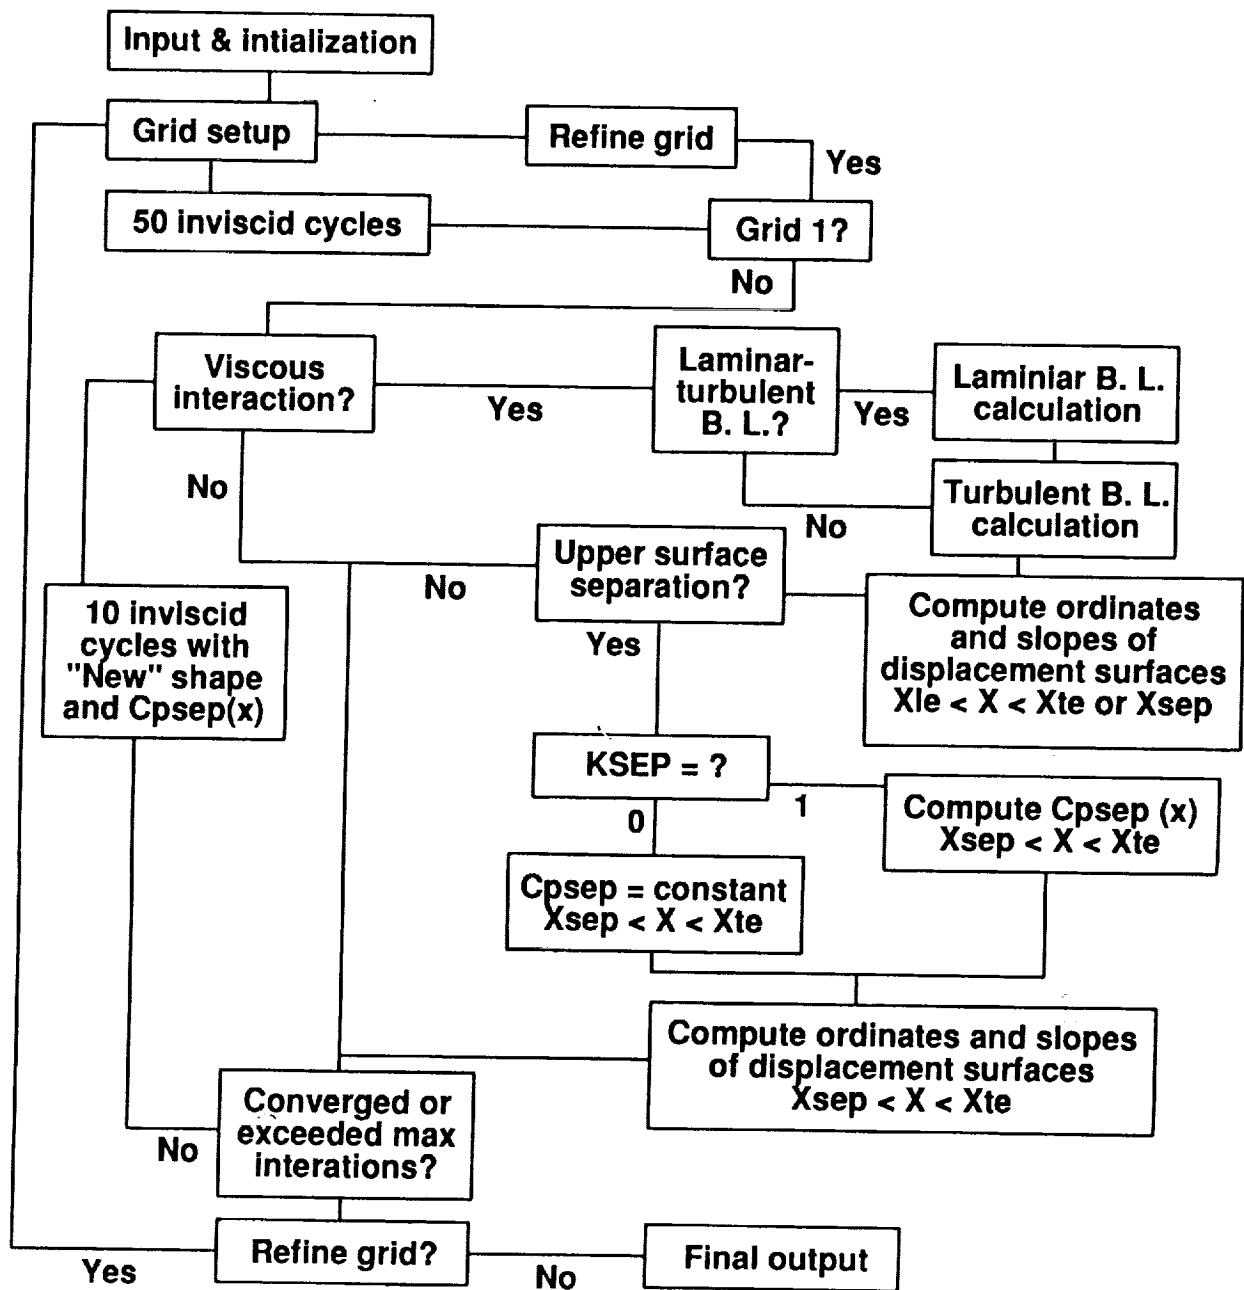


Figure 2.- Iteration and interaction procedure used in TAMSEP.

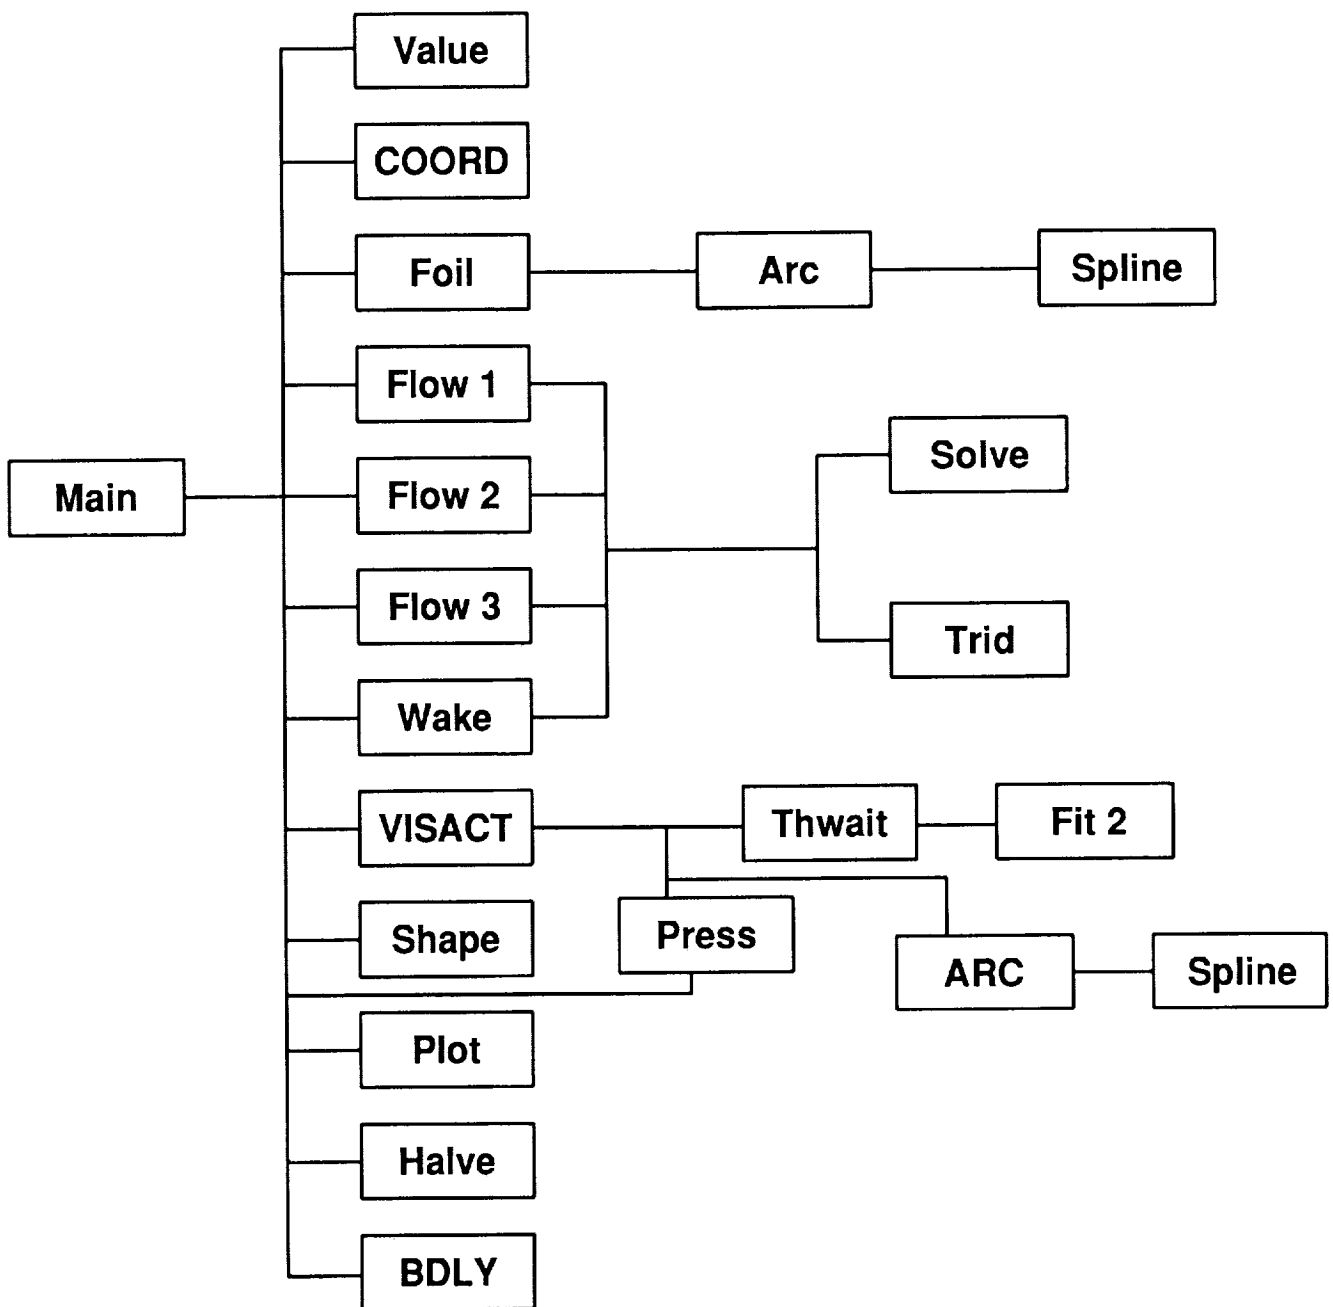


Figure 3.- Subroutine tree for TAMSEP.

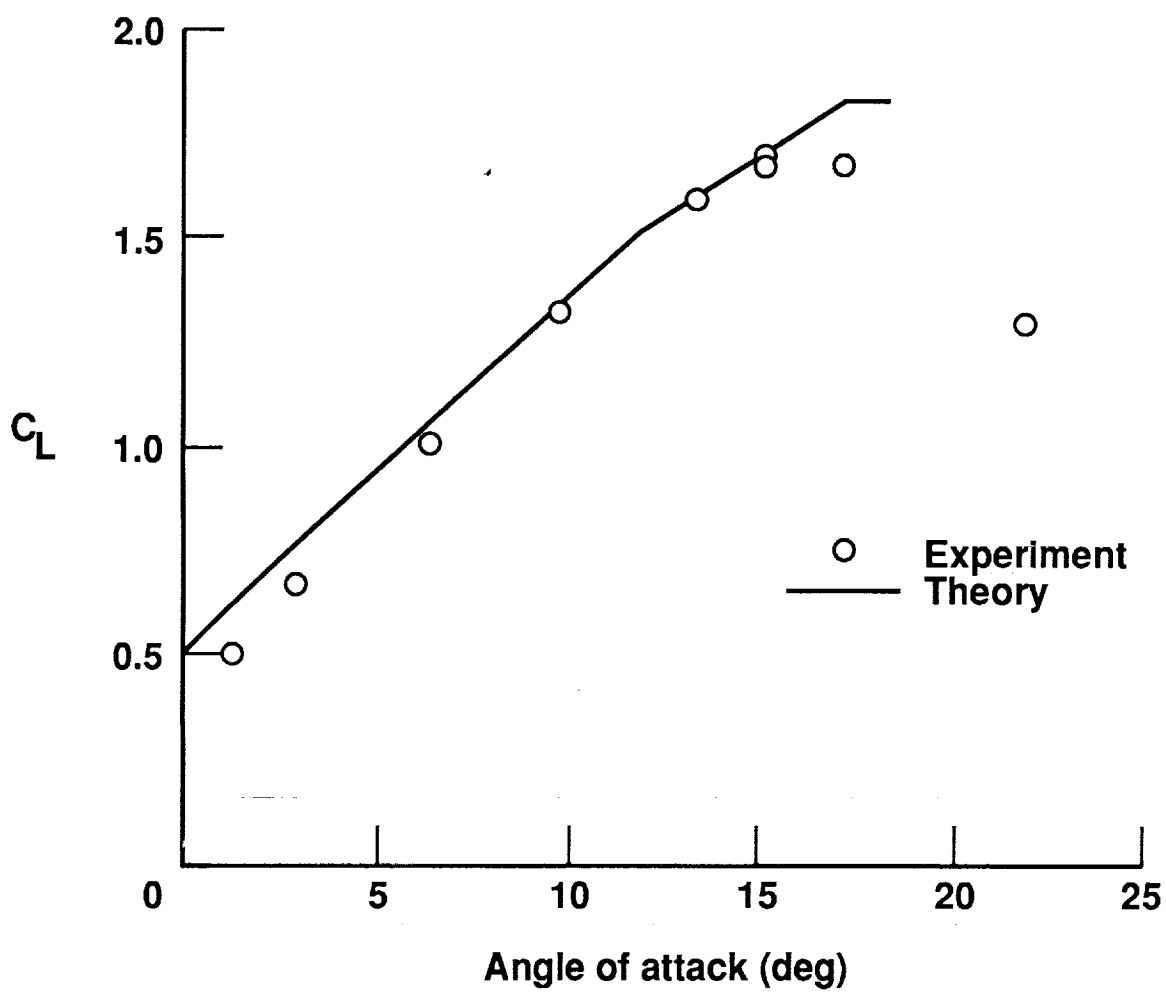


Figure 4.- Comparison of predicted lift coefficient with experimental data.
NACA 4412, $M_\infty = 0.15$, $Rn_\infty = 6.3 \times 10^6$.

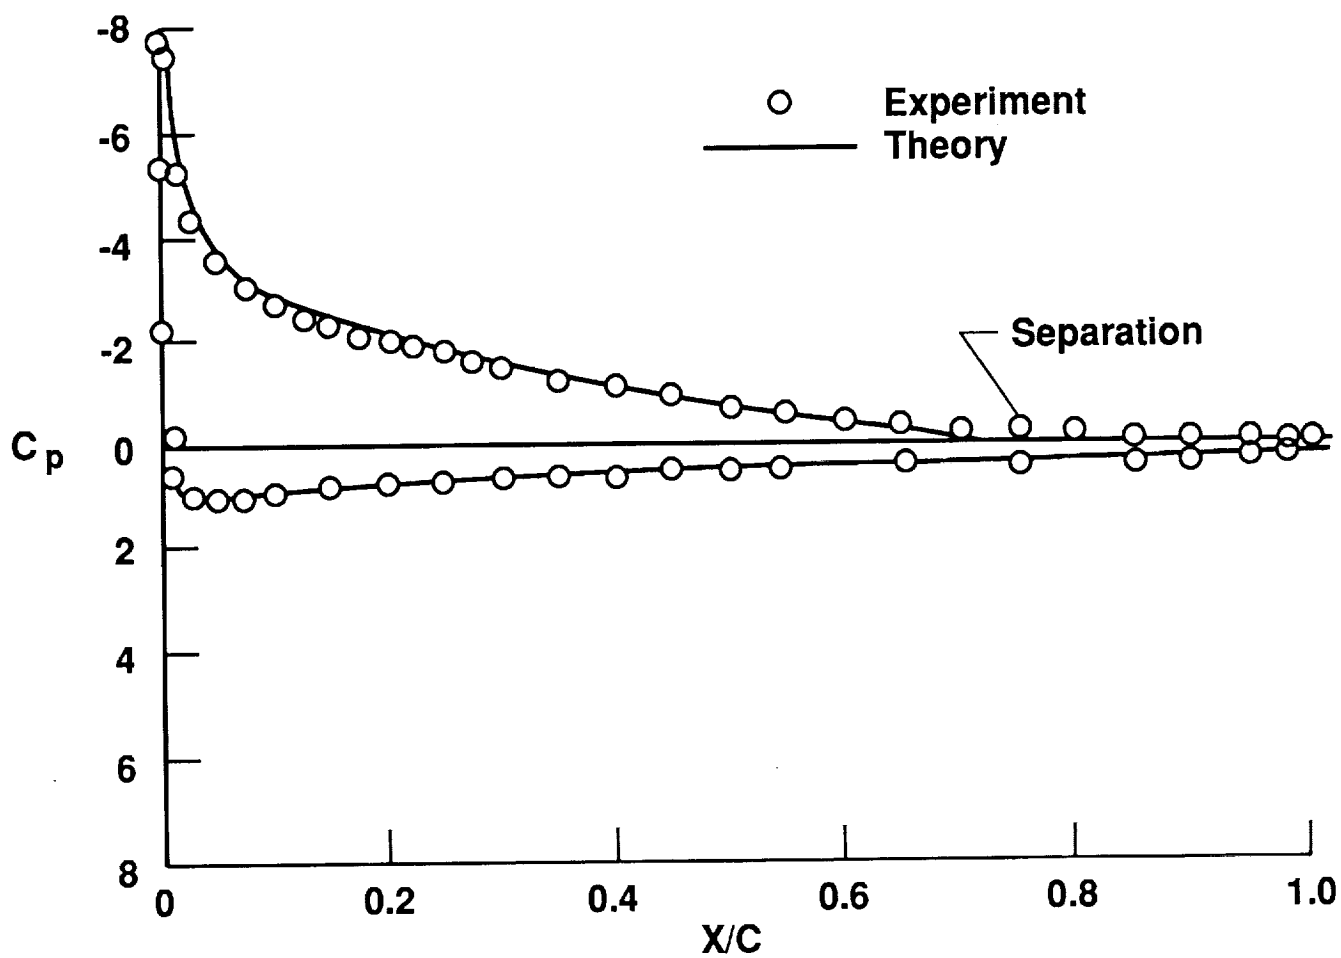


Figure 5.- Comparison of theoretical pressure distribution with experimental data. NACA 4412, $M_\infty = 0.15$, $Rn_\infty = 6.3 \times 10^6$, $\alpha = 15.3$ deg.

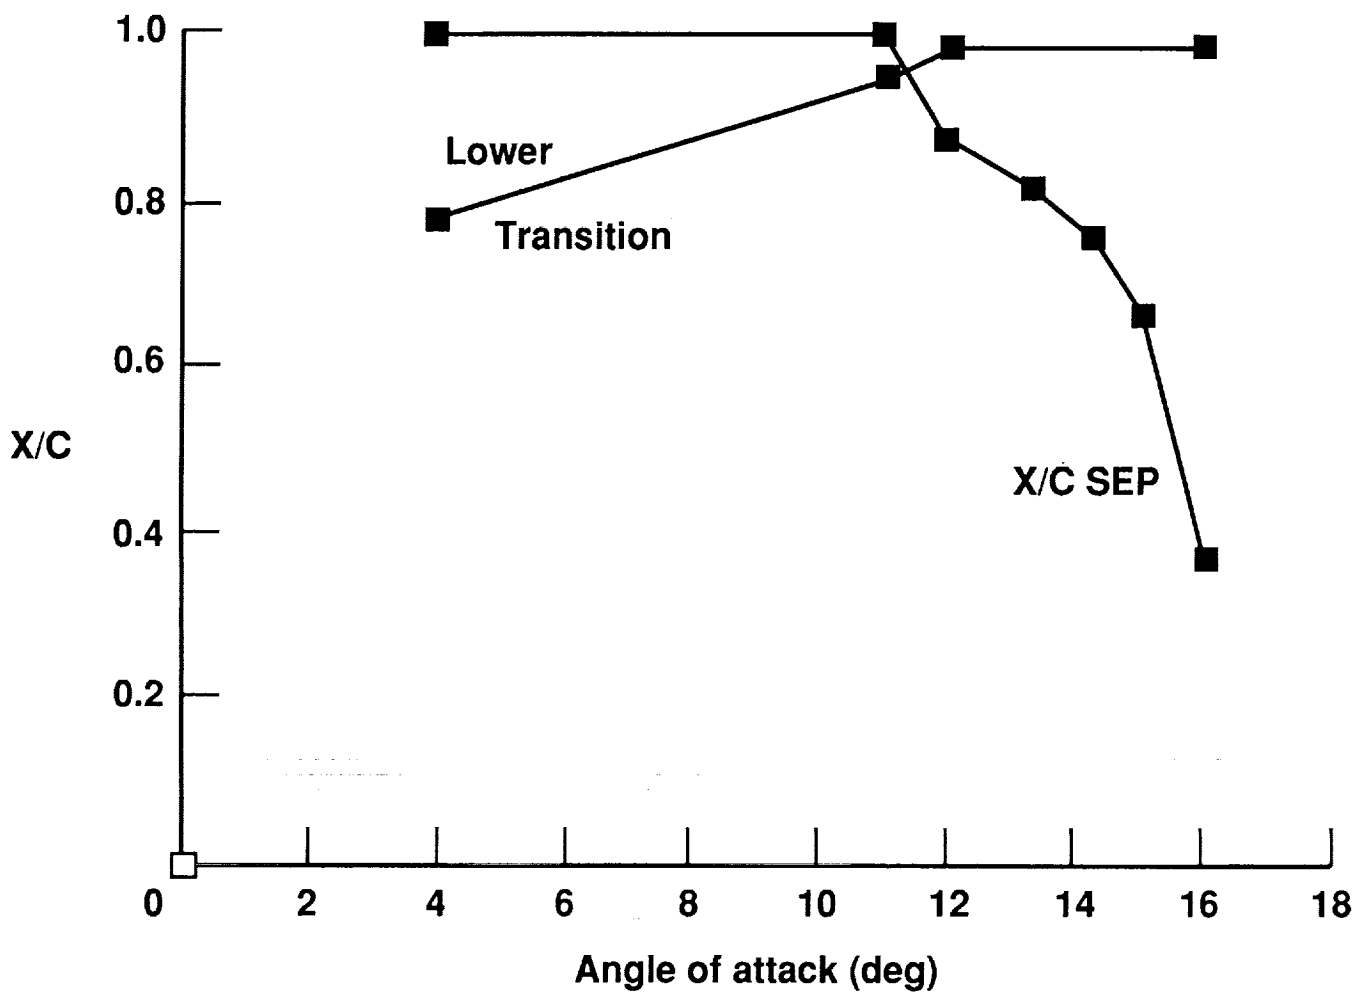


Figure 6.- Lower surface transition and upper surface separation locations.
 NACA 0012, $M_{\infty} = 0.30$, $Rn_{\infty} = 6 \times 10^6$.

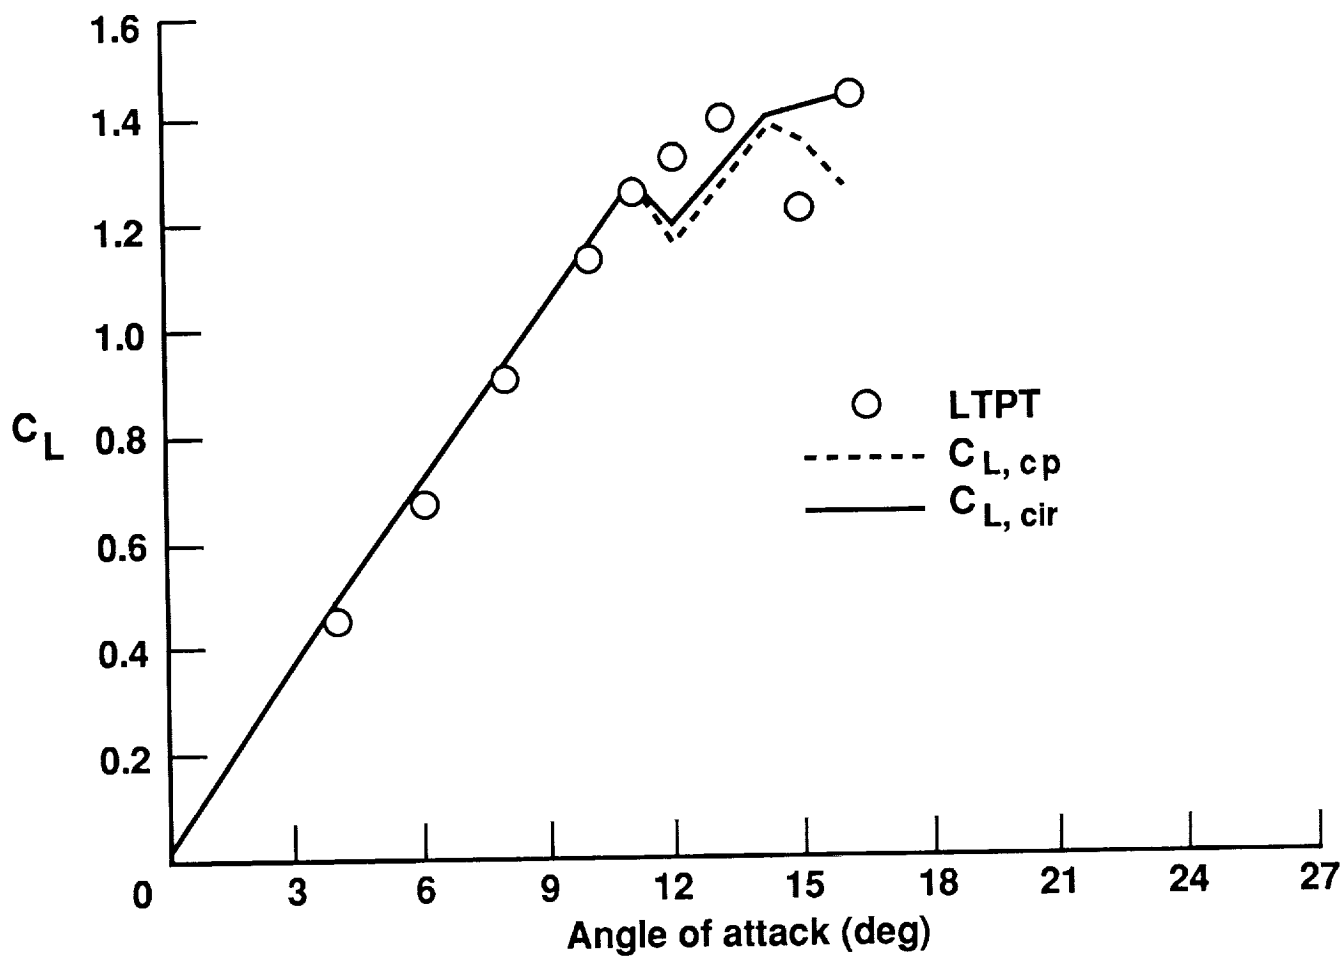


Figure 7.- Comparison of predicted lift coefficient with experimental data.
 NACA 0012, $M_\infty = 0.30$, $Rn_\infty = 6 \times 10^6$.



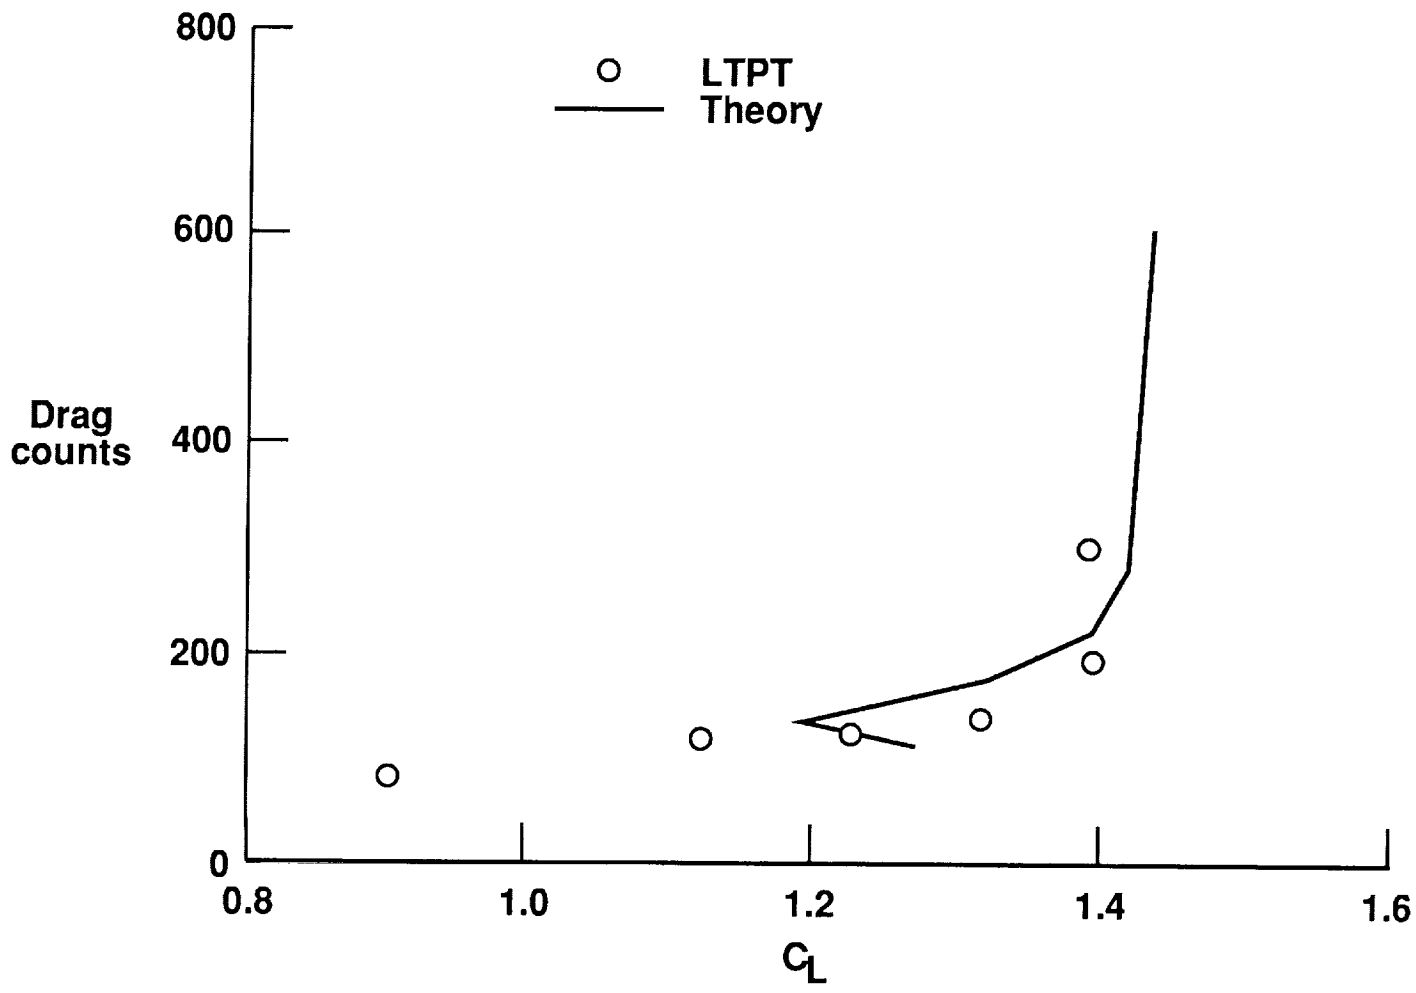


Figure 8.- Comparison of theoretical lift and drag with experimental data.
NACA 0012, $M_\infty = 0.30$, $Rn_\infty = 6 \times 10^6$.

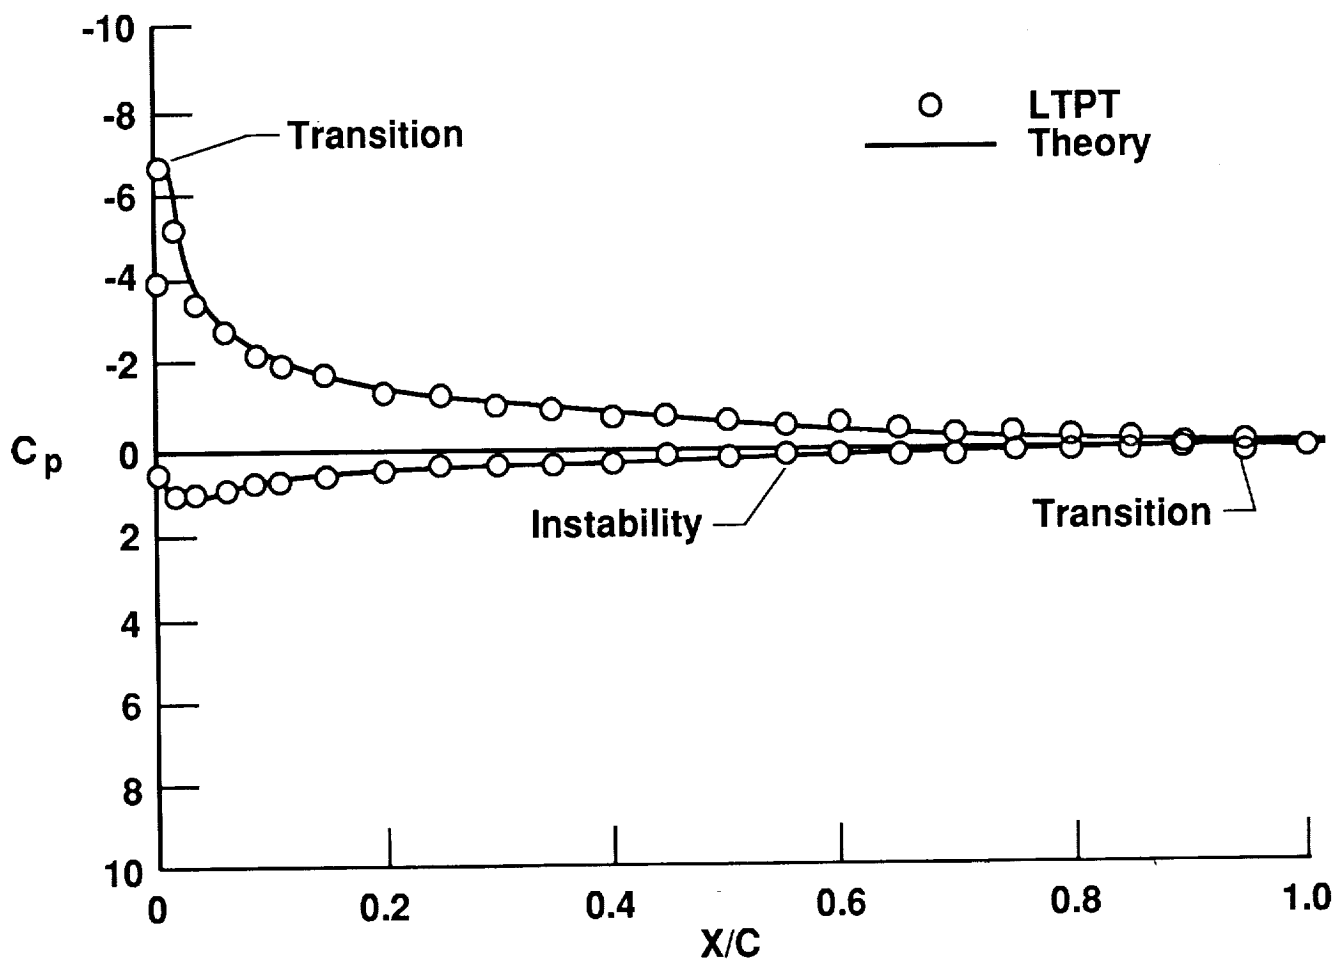


(a) $\alpha = 11.3$ degrees.

Figure 9.- Theoretical and experimental pressure distribution comparisons.
NACA 0012, $M_\infty = 0.30$, $Rn_\infty = 6 \times 10^6$.

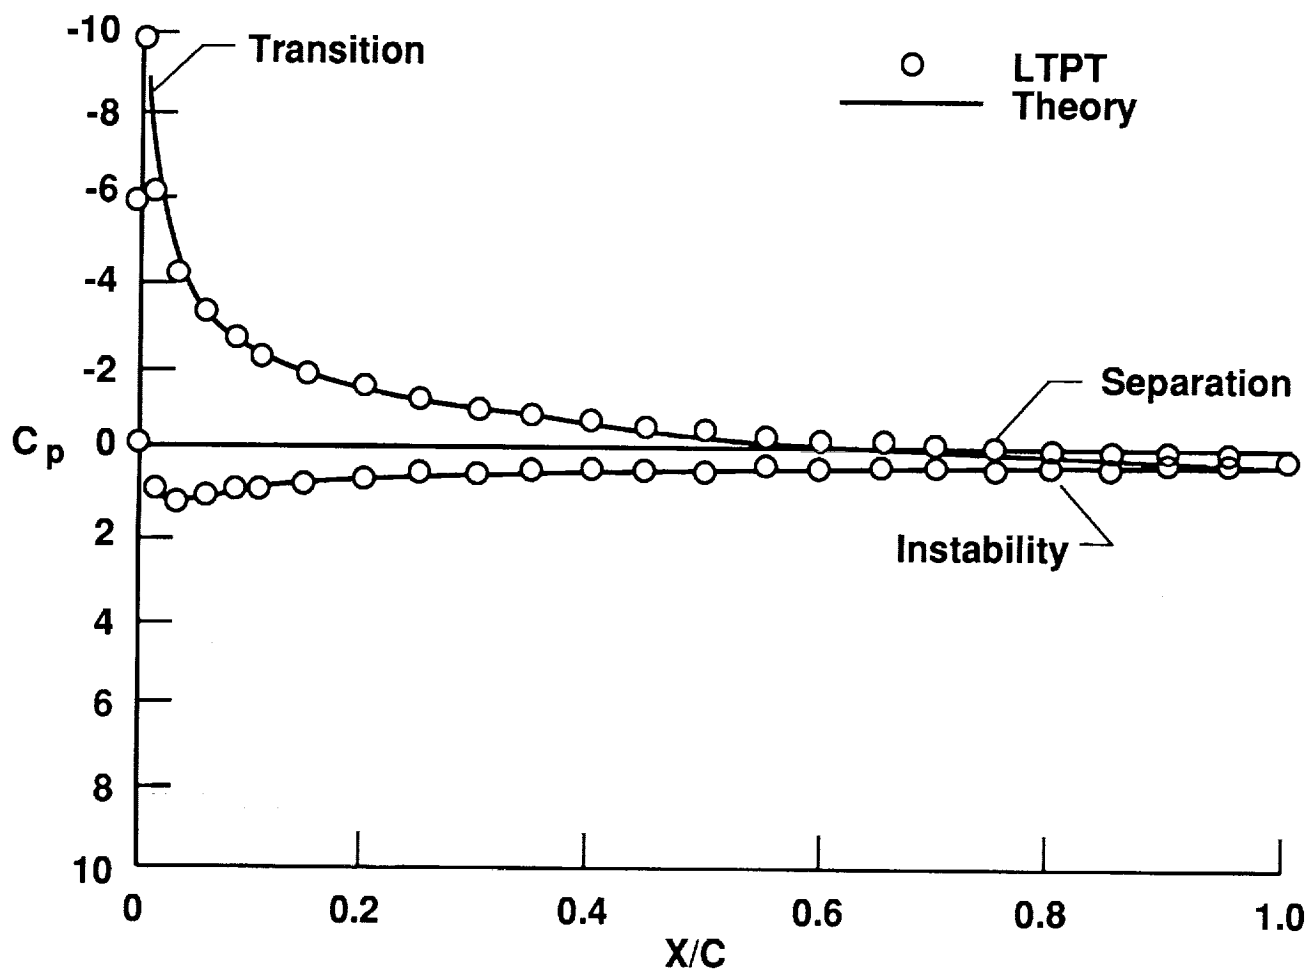

(b) $\alpha = 14.3$ degrees.

Figure 9.- Continued.

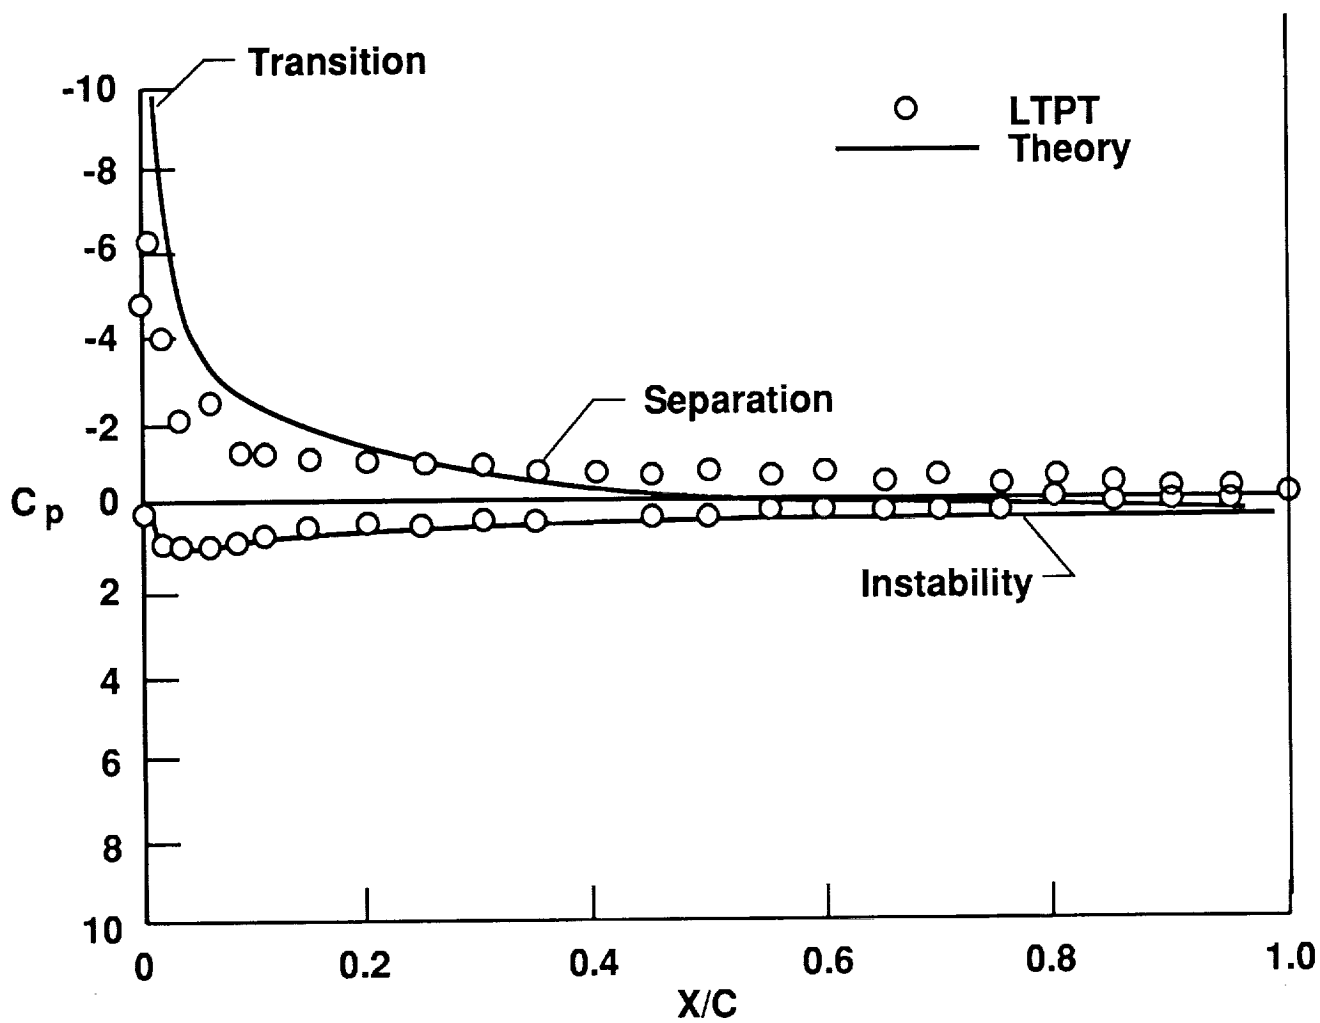

(c) $\alpha = 16.1$ degrees.

Figure 9.- Concluded.

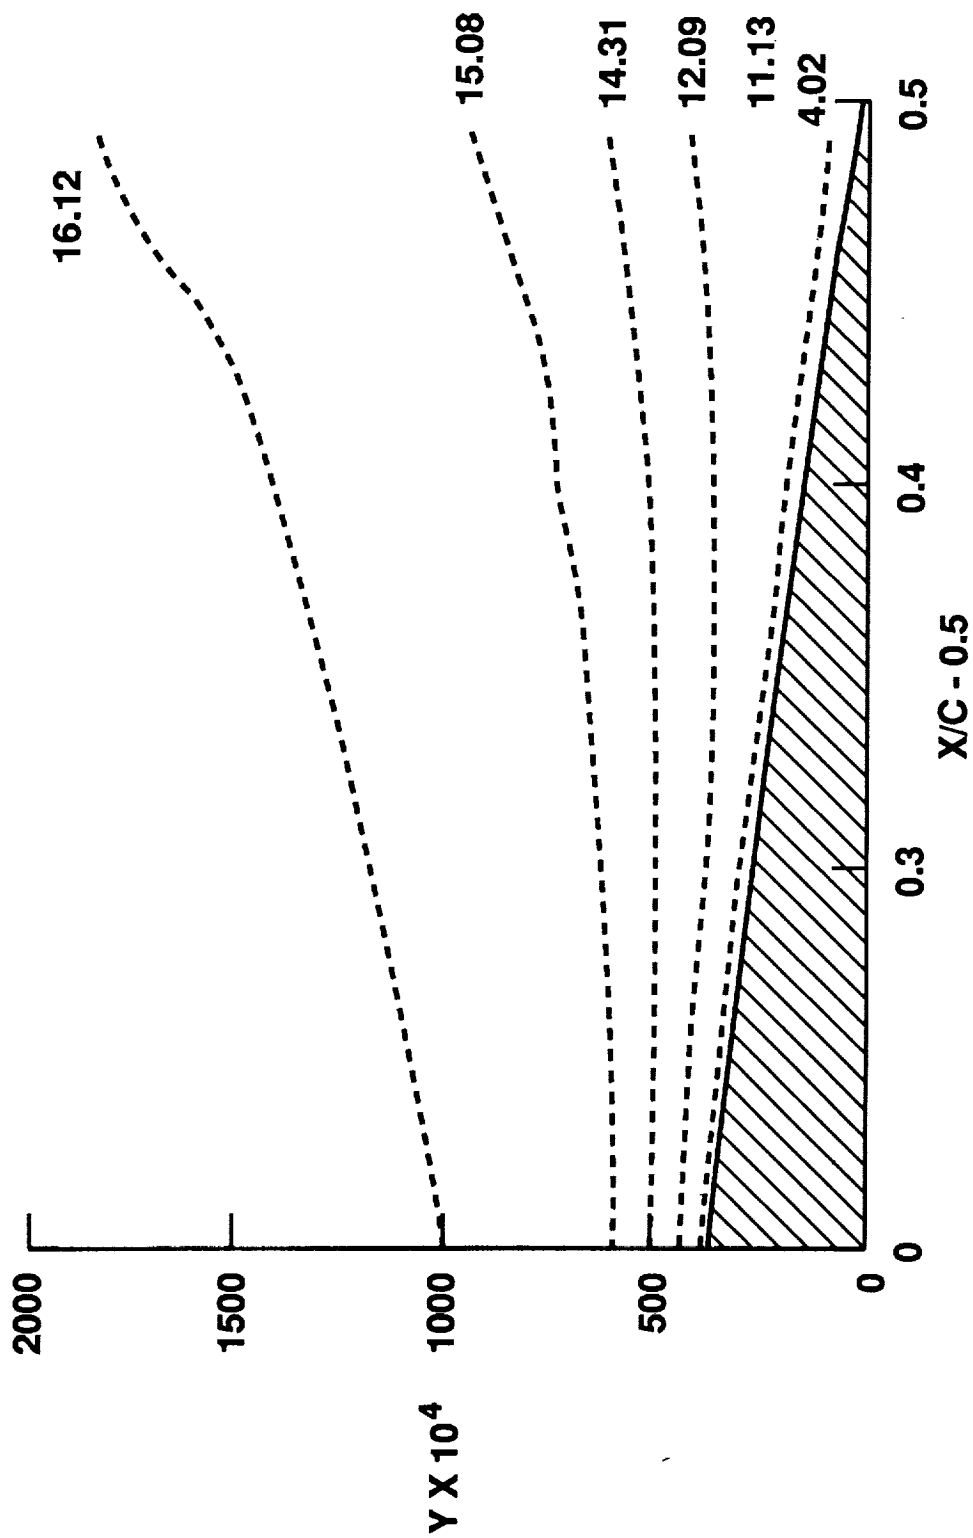


Figure 10.- Predicted displacement surfaces for the NACA 0012 at $M_{\infty} = 0.3$.

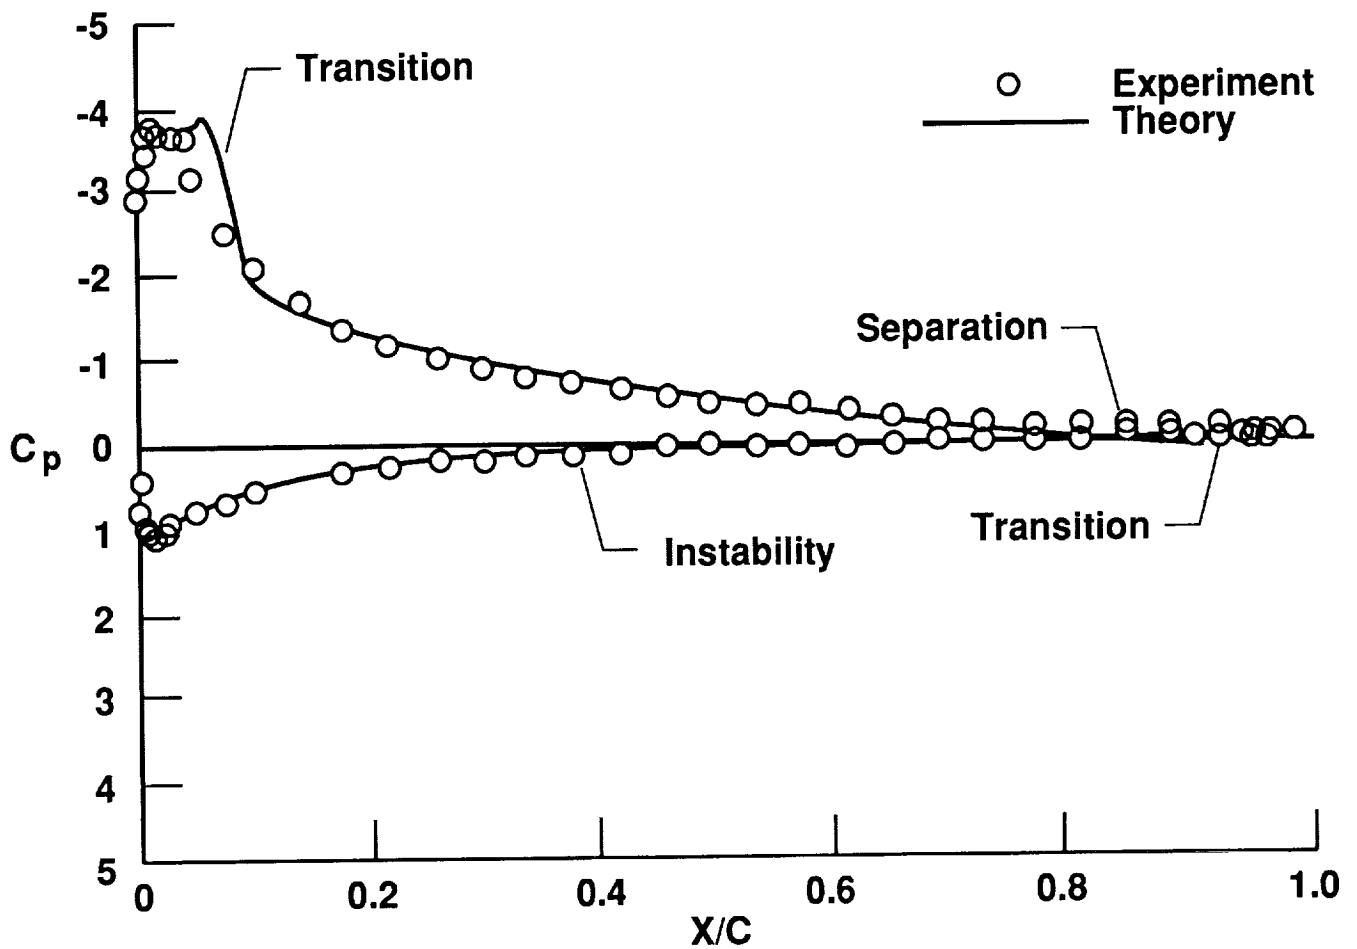


Figure 11.- Theoretical and experimental pressure distribution comparison.
 NACA 0012, $M_\infty = 0.5$, $Rn_\infty = 6 \times 10^6$, $\alpha = 9.25$.

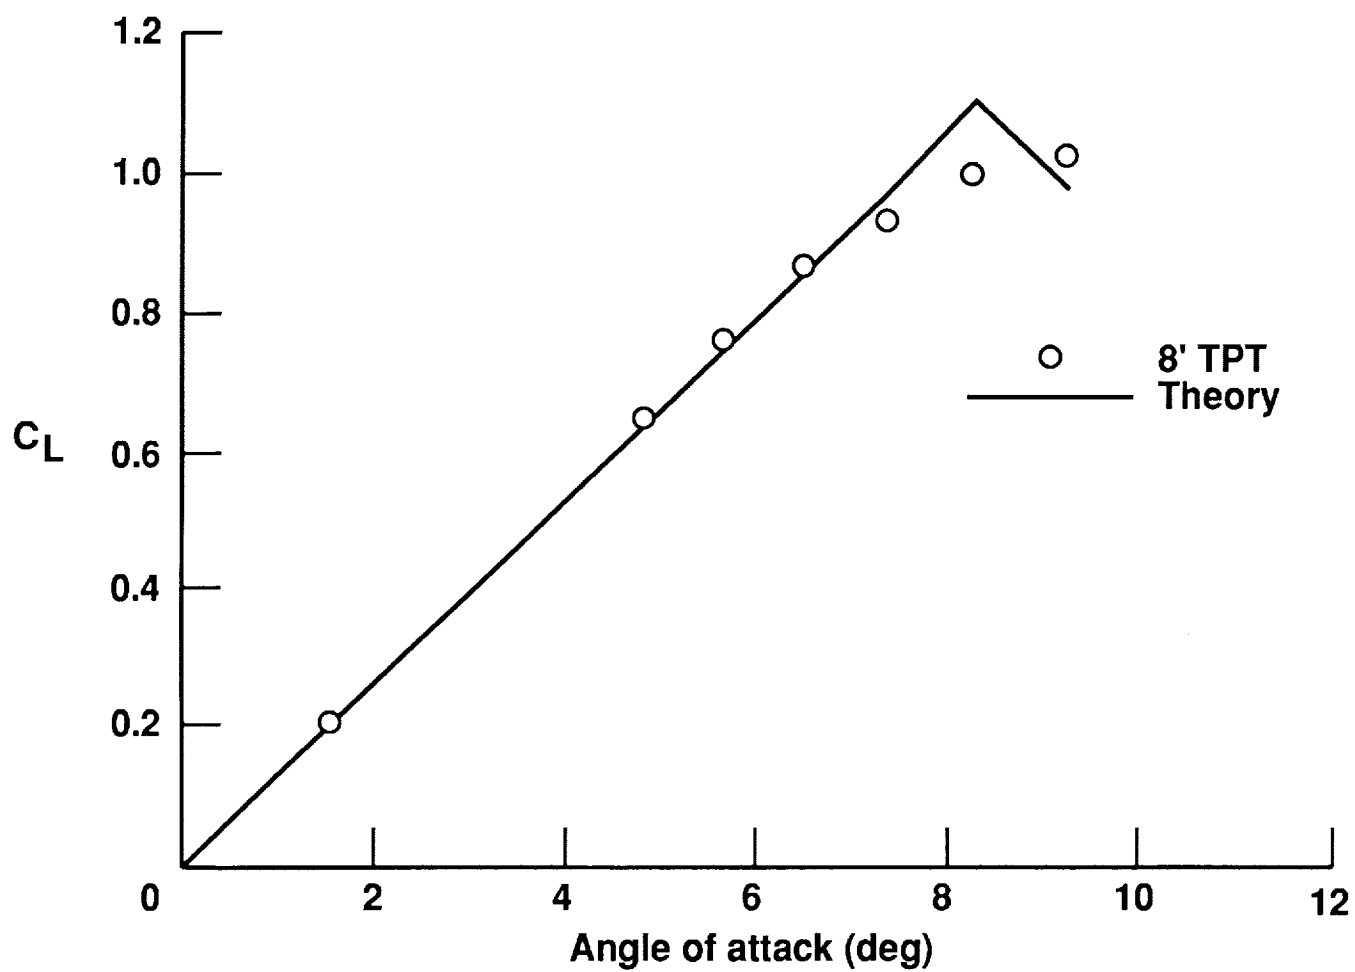


Figure 12.- Comparison of predicted lift coefficient with experimental data.
 NACA 0012, $M_\infty = 0.5$, $Rn_\infty = 9 \times 10^6$.

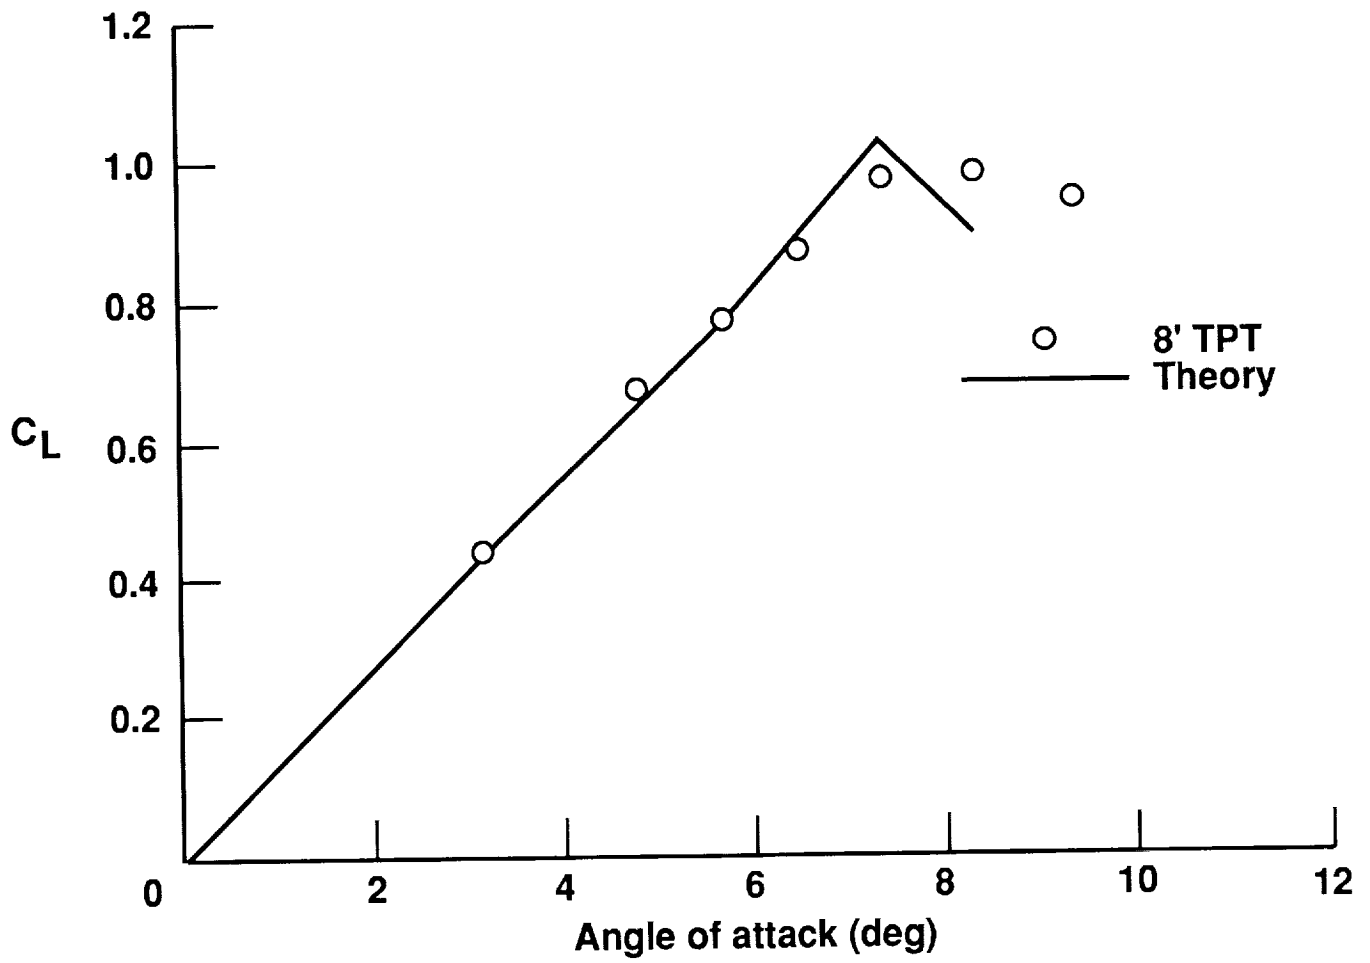


Figure 13.- Comparison of predicted lift coefficient with experimental data.
NACA 0012, $M_\infty = 0.55$, $Rn_\infty = 9 \times 10^6$.

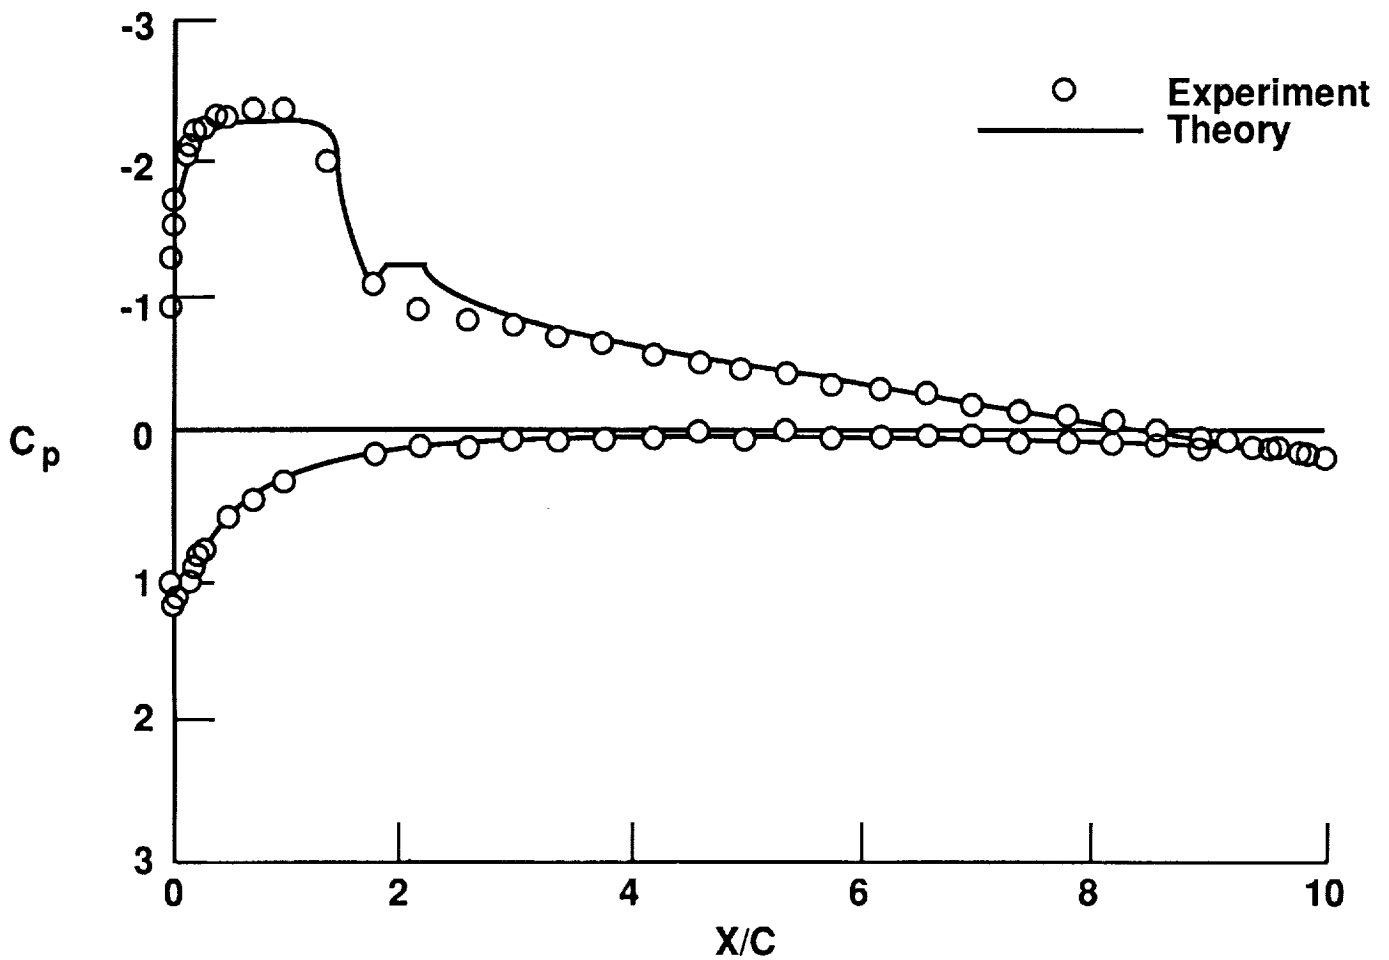


Figure 14.- Theoretical and experimental pressure distribution comparison.
 NACA 0012, $M_\infty = 0.6$, $Rn_\infty = 3 \times 10^6$, $\alpha = 5.59$ deg.

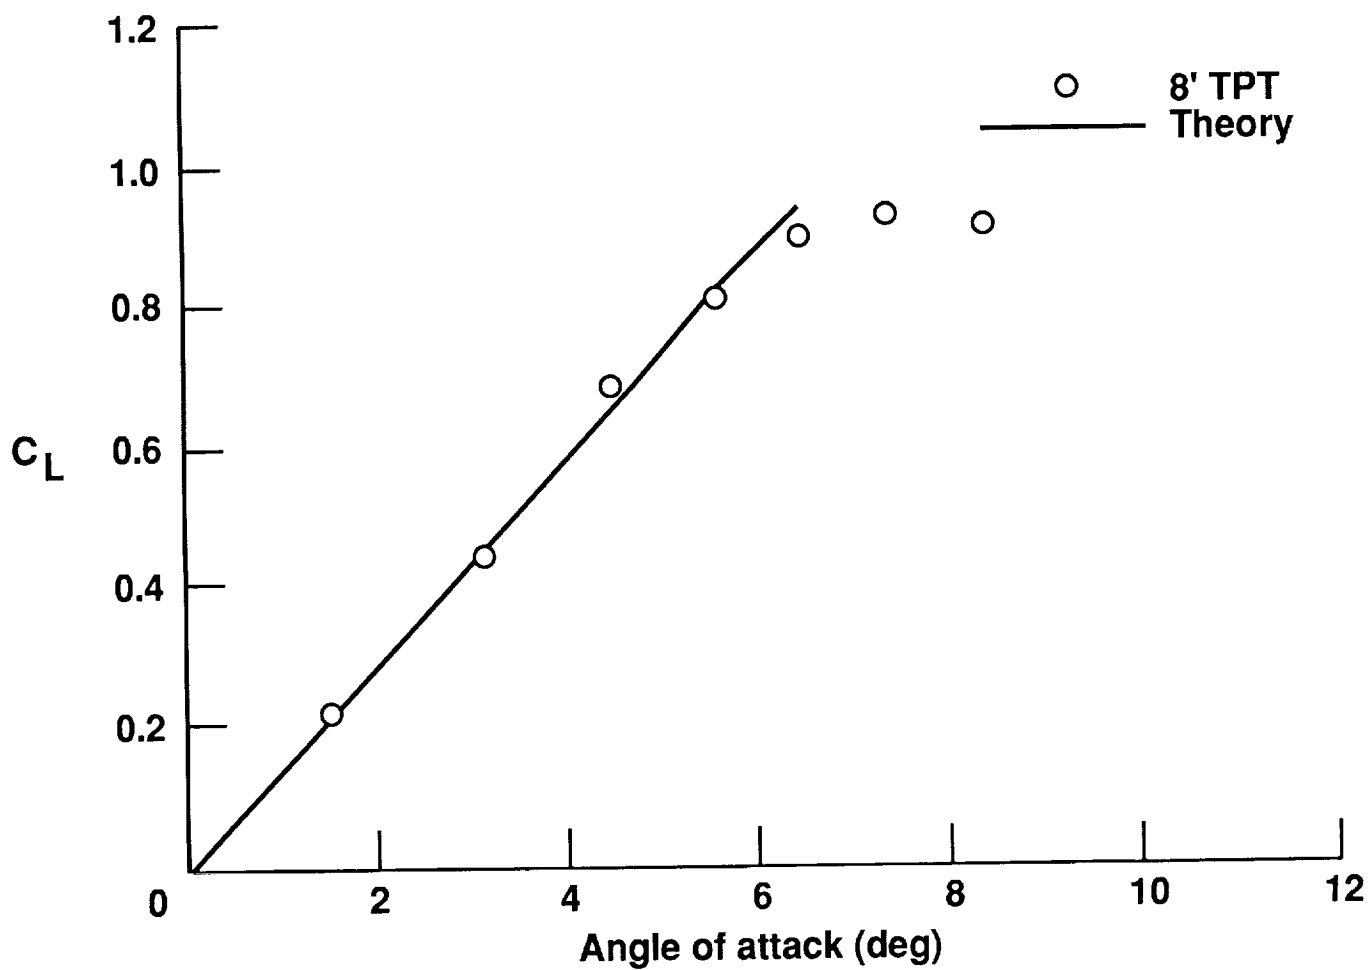


Figure 15.- Comparison of predicted lift coefficient with experimental data.
NACA 0012, $M_\infty = 0.6$, $Rn_\infty = 9 \times 10^6$.

APPENDIX A

Sample Case Input and Output

TEST CASE, NACA 0012, MACH 0.5, RN 6 MILLION, ALPHA 9.25 DEG
 &FINP M=0.501,ALP=9.250,RN=6.00+06,
 EPSS=1.,XPC=.5,&END
 &IINP IKASE=509,NHALF=2,&END

```

96
0.0      0.0      0.002500  0.008717  0.005000  0.012213  0.007500  0.014849
0.010000 0.017037 0.012500 0.018939 0.015000 0.020637 0.017500 0.022179
0.020000 0.023598 0.025000 0.026147 0.037500 0.031374 0.050000 0.035547
0.062500 0.039027 0.075000 0.041999 0.087500 0.044575 0.100000 0.046828
0.112500 0.048808 0.125000 0.050554 0.137500 0.052094 0.150000 0.053452
0.162500 0.054644 0.175000 0.055688 0.187500 0.056594 0.200000 0.057375
0.212500 0.058040 0.225000 0.058596 0.237500 0.059052 0.250000 0.059412
0.262500 0.059684 0.275000 0.059873 0.287500 0.059982 0.300000 0.060017
0.312500 0.059982 0.325000 0.059879 0.337500 0.059713 0.350000 0.059486
0.362500 0.059202 0.375000 0.058863 0.387500 0.058471 0.400000 0.058030
0.412500 0.057541 0.425000 0.057006 0.437500 0.056428 0.450000 0.055807
0.462500 0.055147 0.475000 0.054448 0.487500 0.053712 0.500000 0.052940
0.512500 0.052134 0.525000 0.051296 0.537500 0.050425 0.550000 0.049524
0.562500 0.048594 0.575000 0.047634 0.587500 0.046647 0.600000 0.045634
0.612500 0.044594 0.625000 0.043529 0.637500 0.042439 0.650000 0.041325
0.662500 0.040188 0.675000 0.039027 0.687500 0.037844 0.700000 0.036639
0.712500 0.035412 0.725000 0.034164 0.737500 0.032894 0.750000 0.031603
0.762500 0.030291 0.775000 0.028959 0.787500 0.027605 0.800000 0.026231
0.812500 0.024836 0.825000 0.023420 0.837500 0.021984 0.850000 0.020526
0.862500 0.019046 0.875000 0.017545 0.887500 0.016022 0.900000 0.014477
0.912500 0.012909 0.925000 0.011318 0.937500 0.009704 0.950000 0.008066
0.962500 0.006402 0.975000 0.004714 0.977500 0.004374 0.980000 0.004032
0.982500 0.003689 0.985000 0.003345 0.987500 0.003000 0.990000 0.002654
0.992500 0.002307 0.995000 0.001959 0.997500 0.001610 1.000000 0.001260
0.0      0.0      1.0      0.0      0.0
96
0.0      0.0      0.002500 -0.008717 0.005000 -0.012213 0.007500 -0.014849
0.010000 -0.017037 0.012500 -0.018939 0.015000 -0.020637 0.017500 -0.022179
0.020000 -0.023598 0.025000 -0.026147 0.037500 -0.031374 0.050000 -0.035547
0.062500 -0.039027 0.075000 -0.041999 0.087500 -0.044575 0.100000 -0.046828
0.112500 -0.048808 0.125000 -0.050554 0.137500 -0.052094 0.150000 -0.053452
0.162500 -0.054644 0.175000 -0.055688 0.187500 -0.056594 0.200000 -0.057375
0.212500 -0.058040 0.225000 -0.058596 0.237500 -0.059052 0.250000 -0.059412
0.262500 -0.059684 0.275000 -0.059873 0.287500 -0.059982 0.300000 -0.060017
0.312500 -0.059982 0.325000 -0.059879 0.337500 -0.059713 0.350000 -0.059486
0.362500 -0.059202 0.375000 -0.058863 0.387500 -0.058471 0.400000 -0.058030
0.412500 -0.057541 0.425000 -0.057006 0.437500 -0.056428 0.450000 -0.055807
0.462500 -0.055147 0.475000 -0.054448 0.487500 -0.053712 0.500000 -0.052940
0.512500 -0.052134 0.525000 -0.051296 0.537500 -0.050425 0.550000 -0.049524
0.562500 -0.048594 0.575000 -0.047634 0.587500 -0.046647 0.600000 -0.045634
0.612500 -0.044594 0.625000 -0.043529 0.637500 -0.042439 0.650000 -0.041325
0.662500 -0.040188 0.675000 -0.039027 0.687500 -0.037844 0.700000 -0.036639
0.712500 -0.035412 0.725000 -0.034164 0.737500 -0.032894 0.750000 -0.031603
0.762500 -0.030291 0.775000 -0.028959 0.787500 -0.027605 0.800000 -0.026231
0.812500 -0.024836 0.825000 -0.023420 0.837500 -0.021984 0.850000 -0.020526
0.862500 -0.019046 0.875000 -0.017545 0.887500 -0.016022 0.900000 -0.014477
0.912500 -0.012909 0.925000 -0.011318 0.937500 -0.009704 0.950000 -0.008066
0.962500 -0.006402 0.975000 -0.004714 0.977500 -0.004374 0.980000 -0.004032
0.982500 -0.003689 0.985000 -0.003345 0.987500 -0.003000 0.990000 -0.002654
0.992500 -0.002307 0.995000 -0.001959 0.997500 -0.001610 1.000000 -0.001260
0.0      0.0      -1.0      0.0      0.0

```

TEST CASE, NACA 0012, MACH 0.5, RN 8 MILLION, ALPHA 9.25 DEG

CASE NUMBER 508

MACH NO. IS 0.501 ANGLE OF ATTACK IS 9.250 DEGREES

INVISCID ANALYSIS CASE
WITH LAMINAR TURBULENT VISCOUS INTERACTION
AND MASSIVE SEPARATION
AND VARIABLE PRESSURE IN SEPARATED REGION

AFINP
M= .5000000000 W= 1.88888881 X1= .800000000 X2= 10000.0000 ALP= 181442878 EPS= .0 EPSS= .0
1.000000000 K4= .490000010 S4= 2.000000000 CONV= .100000034E-05 A1= 245888882 A2= .148888878 A3= .0
3.888888888 RN= 8000000.00 KIBDLY= .438888888 CIR= .0 CDCORR= .0 RDEL= .250000000
RDELPM= .1280000000 EP= .400000088E-02 XSEP= .438888888 RCPB= .188888888 CPB= .388888878 XMDN= .470000029
XLEP= .800000000 XPC= .800000000 XLELDY= .438888888 RLAX= 1.000000000 RADUS= .158000000E-01
SEND
ATINP
IMAX= 13 JMAX= 7 IKASE= 508 INV= 0 MITER= 1800 MHALF= 2 ITACT= 1 ISKP2= 1
O, ISKP3= 0, ISKP4= 0, ITERP= 0, IREAD= 0, LP= 1000, IMASS= 1, ILAM= 1
1, IPRT1= 0, IPRT2= 0, KSEP= 1
SEND

X-Y GRID SYSTEM

2 -0.1410E+01	3 -0.4800E+00	4 -0.3706E+00	5 -0.2485E+00	6 -0.1247E+00	7 0.0
8 -0.1247E+00	9 -0.2485E+00	10 -0.3706E+00	11 -0.4800E+00	12 -0.1410E+01	
2 -0.4261E+00	3 -0.1420E+00	4 -0.2303E-07	5 -0.1420E+00	6 -0.4261E+00	

AIRFOIL COORDINATES

X	YU	YL	UPPER SLOPE	LOWER SLOPE
-0.48000	0.01704	-0.01704	0.81058	-0.81058
-0.37058	0.05112	-0.05112	0.12538	-0.12538
-0.24852	0.08945	-0.08945	0.02438	-0.02438
-0.12470	0.08885	-0.08885	-0.02838	0.02838
0.0	0.08284	-0.08284	-0.08318	0.08318
0.12470	0.04355	-0.04355	-0.08515	0.08515
0.24852	0.03178	-0.03178	-0.10383	0.10383
0.37058	0.01808	-0.01808	-0.12033	0.12033
0.48000	0.00285	-0.00285	-0.13880	0.13880

ITERATION 10 CIR =	0.28712 DPM =	0.01880503 AT 12	3 NSEP =	0 DELTAY DR YUITE =	0.0027 SEP AT X =	0.500
ITERATION 20 CIR =	0.42248 DPM =	0.01387036 AT 12	3 NSEP =	0 DELTAY DR YUITE =	0.0027 SEP AT X =	0.500
ITERATION 30 CIR =	0.53824 DPM =	0.01085458 AT 10	3 NSEP =	0 DELTAY DR YUITE =	0.0027 SEP AT X =	0.500
ITERATION 40 CIR =	0.81611 DPM =	0.00788702 AT 8	3 NSEP =	0 DELTAY DR YUITE =	0.0027 SEP AT X =	0.500
ITERATION 50 CIR =	0.87323 DPM =	0.00680323 AT 8	3 NSEP =	2 DELTAY DR YUITE =	0.0027 SEP AT X =	0.500

CP BY CENTRAL DIFFERENCES

X	CPU	CPL
-0.480	-2.801	1.027
-0.371	-3.288	0.171
-0.248	-1.414	0.039
-0.125	-0.864	0.032
0.0	-0.888	0.048
0.125	-0.482	0.071
0.248	-0.308	0.107
0.371	-0.102	0.171
0.480	0.828	0.874

X	YU	YL	SLU	SLL
-0.48000	0.01704	-0.01704	0.81058	-0.81058
-0.37058	0.05112	-0.05112	0.12538	-0.12538
-0.24852	0.08945	-0.08945	0.02438	-0.02438
-0.12470	0.08885	-0.08885	-0.02838	0.02838
0.0	0.08284	-0.08284	-0.08318	0.08318
0.12470	0.04355	-0.04355	-0.08515	0.08515
0.24852	0.03178	-0.03178	-0.10383	0.10383
0.37058	0.01808	-0.01808	-0.12033	0.12033
0.48000	0.00285	-0.00285	-0.13880	0.13880

MACH CHART IN COMPUTATIONAL

PLANE-FREE STREAM FROM TOP

I=2, 12 TOP TO BOTTOM

J= 2, 6 LEFT TO RIGHT

50 49 48 51 53
25 15 0101 44
43 43 0102 58
45 45 0 77 67
45 47 0 71 84
45 47 0 85 61
45 47 0 81 58
45 48 0 87 55
45 45 0 82 52
35 33 0 41 50
48 48 48 48 49

NORMAL FORCE COEFFICIENT CN BY INTEGRATION = 1.2181

WAVE CD = 0.103884
THEORETICALLY ZERO FOR SUBCRITICAL CASES

CASE NO 508

```

-0.4800      U      TB

-0.3700      U      T B L

-0.2300      U      T B

-0.1100      U      T LB

0.0100      U      T B

0.1300      U      T B

0.2500      U      TB L

0.3800      U TB L

0.4800      S      UL

-3.299      -2.488      -2.434      -2.001      -1.588      -1.136      -0.704      -0.271      0.152      0.584      1.027
PRESSURE COEFFICIENT
CPSTAR = -2.1217      CLCIR = 1.3485
CL = 1.2182 CD = 0.103884 CMLE = -0.1083 CDF = 0.0      CMC4 = -0.0037

```

TEST CASE, NACA 0012, MACH 0.5, RN 5 MILLION, ALPHA 9.25 DEG

CASE NUMBER 508

MACH NO. IS 0.501 ANGLE OF ATTACK IS 9.250 DEGREES

INVISCID ANALYSIS CASE
WITH LAMINAR TURBULENT VISCOUS INTERACTION
AND MASSIVE SEPARATION
AND VARIABLE PRESSURE IN SEPARATED REGION

```

SFIMP      M= .500000000      W= 1.500000000      X1= .500000000      X2= 10000.0000      ALP= .151442876      EPS= .0      EPSS=
M= .500000000      X4= .480000010      S4= 2.000000000      CONV= .1000000348-05      A1= .245888882      A2= .148888875      A3=
3.45888888      RN= 5000000.00      XIBDLY= -.438888888      CIR= .673234781      CDCORR= .0      RDEL= .260000000
RDELPH= .125000000      SP= .400000088E-02      XSEP= .438888888      RCPB= .188888888      CPH= .388888878      XMON= .470000028
XLEP= .500000000      XPC= .500000000      XLBOLV= -.438888888      RLAX= 1.000000000      RADUS= .150000008E-01
&END
&IIMP      25, JMAX=      13, IKASE=      508, INV=      0, MITER=      800, NHALF=      2, ITACT=      1, ISKP2=
IMAX=      0, ISKP3=      0, ISKP4=      0, ITERP=      0, IREAD=      0, LP=      1000, IMASS=      1, ILAM=
&END

```

X-Y GRID SYSTEM

```

2 -0.3872E+01      3 -0.1410E+01      4 -0.5471E+00      5 -0.4800E+00      6 -0.4307E+00      7 -0.3708E+00
8 -0.3088E+00      9 -0.2485E+00      10 -0.1868E+00      11 -0.1247E+00      12 -0.8240E-01      13 0.0
14 0.8240E-01      15 0.1247E+00      16 0.1868E+00      17 0.2485E+00      18 0.3088E+00      19 0.3708E+00
20 0.4307E+00      21 0.4800E+00      22 0.5471E+00      23 0.1410E+01      24 0.3872E+01
2 -0.8181E+00      3 -0.4281E+00      4 -0.2480E+00      5 -0.1420E+00      6 -0.8582E-01      7 -0.8213E-07
8 0.8582E-01      9 0.1420E+00      10 0.2480E+00      11 0.4281E+00      12 0.8181E+00

```

AIRFOIL COORDINATES									
X	YU	VL	UPPER SLOPE	LOWER SLOPE					
-0.49000	0.01704	-0.01704	0.81058	-0.81058					
-0.43087	0.04070	-0.04070	0.23678	-0.23678					
-0.37082	0.05112	-0.05112	0.12839	-0.12839					
-0.30882	0.05677	-0.05677	0.08521	-0.08521					
-0.24852	0.05948	-0.05948	0.02436	-0.02436					
-0.18677	0.05998	-0.05998	0.00589	-0.00589					
-0.12470	0.05885	-0.05885	0.02839	0.02839					
-0.05240	0.05842	-0.05842	0.04802	0.04802					
0.0	0.05284	-0.05284	0.08316	0.08316					
0.06240	0.04680	-0.04680	0.07559	0.07559					
0.12470	0.04355	-0.04355	0.08815	0.08815					
0.18677	0.03781	-0.03781	0.08541	0.08541					
0.24852	0.03176	-0.03176	0.10383	0.10383					
0.30882	0.02614	-0.02614	0.11209	0.11209					
0.37082	0.01808	-0.01808	0.12033	0.12033					
0.43087	0.01059	-0.01059	0.12803	0.12803					
0.49000	0.00285	-0.00285	0.13880	0.13880					
ITERATION 10 CIR	0.88574 DPM	0.00518671 AT 8	5 NSSP	3 DELTAY DR YUITE	0.0027 SEP AT X	0.500			
ITERATION 20 CIR	0.88872 DPM	0.00088282 AT 4	12 NSSP	3 DELTAY DR YUITE	0.0027 SEP AT X	0.500			
ITERATION 30 CIR	0.88924 DPM	0.00041886 AT 16	5 NSSP	3 DELTAY DR YUITE	0.0027 SEP AT X	0.500			
ITERATION 40 CIR	0.87196 DPM	0.00036828 AT 17	5 NSSP	3 DELTAY DR YUITE	0.0027 SEP AT X	0.500			
ITERATION 50 CIR	0.87448 DPM	0.00032288 AT 17	5 NSSP	3 DELTAY DR YUITE	0.0027 SEP AT X	0.500			
USTCK LT ZERO									
ITERATION 80 CIR	0.83232 DPM	0.00300038 AT 24	5 NSSP	4 DELTAY DR YUITE	0.0275 SEP AT X	0.431			
USTCK LT ZERO									
ITERATION 70 CIR	0.81567 DPM	0.00143983 AT 24	5 NSSP	4 DELTAY DR YUITE	0.0247 SEP AT X	0.371			
ITERATION 80 CIR	0.80273 DPM	0.00120503 AT 24	5 NSSP	4 DELTAY DR YUITE	0.0176 SEP AT X	0.371			
ITERATION 80 CIR	0.89064 DPM	0.00106846 AT 24	5 NSSP	3 DELTAY DR YUITE	0.0203 SEP AT X	0.371			
ITERATION 100 CIR	0.88032 DPM	0.00081708 AT 24	5 NSSP	3 DELTAY DR YUITE	0.0188 SEP AT X	0.371			
ITERATION 110 CIR	0.87111 DPM	0.00085264 AT 24	5 NSSP	3 DELTAY DR YUITE	0.0204 SEP AT X	0.371			
ITERATION 120 CIR	0.86283 DPM	0.00078028 AT 23	5 NSSP	3 DELTAY DR YUITE	0.0208 SEP AT X	0.371			
ITERATION 130 CIR	0.85583 DPM	0.00070220 AT 24	5 NSSP	3 DELTAY DR YUITE	0.0214 SEP AT X	0.371			
ITERATION 140 CIR	0.84910 DPM	0.00061884 AT 23	5 NSSP	3 DELTAY DR YUITE	0.0220 SEP AT X	0.371			
ITERATION 150 CIR	0.84324 DPM	0.00053001 AT 22	5 NSSP	3 DELTAY DR YUITE	0.0226 SEP AT X	0.371			
ITERATION 160 CIR	0.83794 DPM	0.00044542 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0233 SEP AT X	0.371			
ITERATION 170 CIR	0.83318 DPM	0.00036176 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0238 SEP AT X	0.371			
ITERATION 180 CIR	0.82882 DPM	0.00028081 AT 21	5 NSSP	2 DELTAY DR YUITE	0.0246 SEP AT X	0.371			
ITERATION 190 CIR	0.82484 DPM	0.00020188 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0253 SEP AT X	0.371			
ITERATION 200 CIR	0.82120 DPM	0.00012408 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0260 SEP AT X	0.371			
ITERATION 210 CIR	0.81784 DPM	0.000037134 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0268 SEP AT X	0.371			
ITERATION 220 CIR	0.81478 DPM	0.000033681 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0272 SEP AT X	0.371			
ITERATION 230 CIR	0.81189 DPM	0.000031424 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0278 SEP AT X	0.371			
ITERATION 240 CIR	0.80923 DPM	0.000028860 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0284 SEP AT X	0.371			
ITERATION 250 CIR	0.80678 DPM	0.000027114 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0288 SEP AT X	0.371			
ITERATION 260 CIR	0.80442 DPM	0.000025336 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0286 SEP AT X	0.371			
ITERATION 270 CIR	0.80224 DPM	0.000023264 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0300 SEP AT X	0.371			
ITERATION 280 CIR	0.80020 DPM	0.000021498 AT 21	5 NSSP	2 DELTAY DR YUITE	0.0304 SEP AT X	0.371			
ITERATION 290 CIR	0.79827 DPM	0.000020403 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0308 SEP AT X	0.371			
ITERATION 300 CIR	0.79644 DPM	0.000018868 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0313 SEP AT X	0.371			
ITERATION 310 CIR	0.79471 DPM	0.000017697 AT 21	5 NSSP	2 DELTAY DR YUITE	0.0317 SEP AT X	0.371			
ITERATION 320 CIR	0.79307 DPM	0.000017448 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0321 SEP AT X	0.371			
ITERATION 330 CIR	0.79150 DPM	0.000018868 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0326 SEP AT X	0.371			
ITERATION 340 CIR	0.79002 DPM	0.000014858 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0332 SEP AT X	0.371			
ITERATION 350 CIR	0.78860 DPM	0.000013483 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0336 SEP AT X	0.371			
ITERATION 360 CIR	0.78724 DPM	0.000014081 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0338 SEP AT X	0.371			
ITERATION 370 CIR	0.78595 DPM	0.000012484 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0341 SEP AT X	0.371			
ITERATION 380 CIR	0.78471 DPM	0.000011474 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0344 SEP AT X	0.371			
ITERATION 390 CIR	0.78352 DPM	0.000010487 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0347 SEP AT X	0.371			
ITERATION 400 CIR	0.78238 DPM	0.000011170 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0349 SEP AT X	0.371			
ITERATION 410 CIR	0.78128 DPM	0.000010887 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0352 SEP AT X	0.371			
ITERATION 420 CIR	0.78028 DPM	0.000010887 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0354 SEP AT X	0.371			
ITERATION 430 CIR	0.77924 DPM	0.000010300 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0356 SEP AT X	0.371			
ITERATION 440 CIR	0.77828 DPM	0.000011460 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0358 SEP AT X	0.371			
ITERATION 450 CIR	0.77735 DPM	0.000009288 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0358 SEP AT X	0.371			
ITERATION 460 CIR	0.77648 DPM	0.000009148 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0361 SEP AT X	0.371			
ITERATION 470 CIR	0.77560 DPM	0.000008005 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0363 SEP AT X	0.371			
ITERATION 480 CIR	0.77477 DPM	0.000007993 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0365 SEP AT X	0.371			
ITERATION 490 CIR	0.77398 DPM	0.000008214 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0367 SEP AT X	0.371			
ITERATION 500 CIR	0.77322 DPM	0.000008225 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0368 SEP AT X	0.371			
ITERATION 510 CIR	0.77249 DPM	0.000007123 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0370 SEP AT X	0.371			
ITERATION 520 CIR	0.77178 DPM	0.000007318 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0372 SEP AT X	0.371			
ITERATION 530 CIR	0.77111 DPM	0.000006461 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0373 SEP AT X	0.371			
ITERATION 540 CIR	0.77048 DPM	0.000006846 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0375 SEP AT X	0.371			
ITERATION 550 CIR	0.76983 DPM	0.000006324 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0376 SEP AT X	0.371			
ITERATION 560 CIR	0.76923 DPM	0.000005887 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0378 SEP AT X	0.371			
ITERATION 570 CIR	0.76865 DPM	0.000005887 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0378 SEP AT X	0.371			
ITERATION 580 CIR	0.76810 DPM	0.000005287 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0381 SEP AT X	0.371			
ITERATION 590 CIR	0.76757 DPM	0.000004905 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0382 SEP AT X	0.371			
ITERATION 600 CIR	0.76706 DPM	0.000004888 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0383 SEP AT X	0.371			
ITERATION 610 CIR	0.76658 DPM	0.000005573 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0384 SEP AT X	0.371			
ITERATION 620 CIR	0.76609 DPM	0.000004888 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0385 SEP AT X	0.371			
ITERATION 630 CIR	0.76563 DPM	0.000004871 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0386 SEP AT X	0.371			
ITERATION 640 CIR	0.76519 DPM	0.000004107 AT 22	5 NSSP	2 DELTAY DR YUITE	0.0387 SEP AT X	0.371			
ITERATION 650 CIR	0.76477 DPM	0.000004288 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0388 SEP AT X	0.371			
ITERATION 660 CIR	0.76437 DPM	0.000003989 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0388 SEP AT X	0.371			
ITERATION 670 CIR	0.76398 DPM	0.000004411 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0389 SEP AT X	0.371			
ITERATION 680 CIR	0.76361 DPM	0.000003834 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0391 SEP AT X	0.371			
ITERATION 690 CIR	0.76325 DPM	0.000004750 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0392 SEP AT X	0.371			
ITERATION 700 CIR	0.76291 DPM	0.000003409 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0392 SEP AT X	0.371			
ITERATION 710 CIR	0.76258 DPM	0.000003266 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0393 SEP AT X	0.371			
ITERATION 720 CIR	0.76227 DPM	0.000003888 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0394 SEP AT X	0.371			
ITERATION 730 CIR	0.76198 DPM	0.000003895 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0395 SEP AT X	0.371			
ITERATION 740 CIR	0.76167 DPM	0.000002788 AT 20	5 NSSP	2 DELTAY DR YUITE	0.0395 SEP AT X	0.371			
ITERATION 750 CIR	0.76138 DPM	0.000004468 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0396 SEP AT X	0.371			
ITERATION 760 CIR	0.76112 DPM	0.000004088 AT 24	5 NSSP	2 DELTAY DR YUITE	0.0397 SEP AT X	0.371			
ITERATION 770 CIR	0.76086 DPM	0.000002718 AT 2	5 NSSP	2 DELTAY DR YUITE	0.0397 SEP AT X	0.371			
ITERATION 780 CIR	0.76062 DPM	0.000002458 AT 23	4 NSSP	2 DELTAY DR YUITE	0.0398 SEP AT X	0.371			
ITERATION 790 CIR	0.76038 DPM	0.000002856 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0398 SEP AT X	0.371			
ITERATION 800 CIR	0.76015 DPM	0.000002891 AT 23	5 NSSP	2 DELTAY DR YUITE	0.0399 SEP AT X	0.371			

ORIGINAL PAGE IS
OF POOR QUALITY

BOUNDARY LAYER ANALYSIS FOR REYNOLDS NUMBER OF 0.000E+07

X	YUORIG	DU	SLU	YLDORIG	DL	SLL
-0.49000	0.01704	0.0	0.81058	-0.01704	0.0	-0.81058
-0.43067	0.04070	0.00018	0.18721	-0.04070	0.00016	-0.18562
-0.37058	0.05112	0.00038	0.13870	-0.05112	0.00018	-0.13575
-0.30982	0.05877	0.00070	0.08847	-0.05877	0.00022	-0.08325
-0.24852	0.05945	0.00110	0.03171	-0.05945	0.00028	-0.02579
-0.18577	0.05988	0.00151	0.00087	-0.05988	0.00030	0.00542
-0.12470	0.05885	0.00194	-0.02218	-0.05885	0.00035	0.02866
-0.06240	0.05647	0.00240	-0.04025	-0.05647	0.00038	0.04739
0.0	0.05284	0.00281	-0.05448	-0.05284	0.00042	0.05249
0.08240	0.04850	0.00348	-0.05549	-0.04850	0.00046	0.07488
0.12470	0.04355	0.00418	-0.07375	-0.04355	0.00050	0.08558
0.18577	0.03781	0.00510	-0.07656	-0.03781	0.00053	0.09483
0.24852	0.03178	0.00684	-0.06235	-0.03178	0.00058	0.10300
0.30982	0.02514	0.01053	-0.02754	-0.02514	0.00068	0.11012
0.37058	0.01808	0.01732	0.00131	-0.01808	0.00083	0.11854
0.43067	0.01058	0.02845	0.03783	-0.01058	0.00108	0.12449
0.49000	0.00285	0.03547	0.08803	-0.00285	0.00135	0.13412

CP BY CENTRAL DIFFERENCES

X	CPU	CPL
-0.490	-2.722	1.048
-0.431	-2.887	0.551
-0.371	-1.716	0.350
-0.310	-1.353	0.229
-0.249	-1.076	0.160
-0.187	-0.881	0.112
-0.125	-0.717	0.081
-0.062	-0.577	0.080
0.0	-0.454	0.047
0.062	-0.340	0.038
0.125	-0.228	0.033
0.187	-0.112	0.030
0.249	0.002	0.030
0.310	0.078	0.032
0.371	0.107	0.035
0.431	0.157	0.043
0.490	0.198	0.118

X	YU	YL	SLU	SLL
-0.49000	0.01703	-0.01703	0.81058	-0.81058
-0.43067	0.04088	-0.04088	0.18721	-0.18562
-0.37058	0.05151	-0.05130	0.13870	-0.13575
-0.30982	0.05744	-0.05888	0.08847	-0.08325
-0.24852	0.06054	-0.05971	0.03171	-0.02579
-0.18577	0.06148	-0.06028	0.00087	0.00542
-0.12470	0.06078	-0.05820	-0.02218	0.02866
-0.06240	0.05882	-0.05881	-0.04025	0.04739
0.0	0.05585	-0.05338	-0.05448	0.05249
0.08240	0.05209	-0.04806	-0.05549	0.07488
0.12470	0.04774	-0.04405	-0.07375	0.08558
0.18577	0.04303	-0.03845	-0.07656	0.09483
0.24852	0.03881	-0.03234	-0.06235	0.10300
0.30982	0.03577	-0.02580	-0.02754	0.11012
0.37058	0.03486	-0.01881	0.00131	0.11854
0.43067	0.03613	-0.01189	0.03783	0.12449
0.49000	0.03882	-0.00402	0.08803	0.13412

MACH CHART IN COMPUTATIONAL

PLANE-FREE STREAM FROM TOP

I=2,24 TOP TO BOTTOM

J= 2,12 LEFT TO RIGHT

50	50	50	50	50	50	50	50	50	50	50	50
48	48	48	48	48	48	48	48	48	48	48	48
45	44	44	43	43	47	52	55	56	55	54	54
43	38	31	24	14	0101	87	79	70	58	58	58
48	43	39	35	33	0105	84	72	63	56	56	56
48	43	40	39	39	0	88	78	71	63	56	56
48	43	42	42	43	0	81	75	69	63	56	56
48	44	43	44	45	0	75	72	67	62	56	56
46	45	45	45	48	0	71	68	65	61	55	55
46	45	45	46	47	0	87	85	83	80	55	55
46	45	45	47	48	0	84	83	81	59	55	55
47	48	47	47	48	0	81	80	59	58	55	55
47	47	47	48	48	0	58	58	57	55	54	54
47	47	47	48	49	0	55	55	55	55	54	54
47	47	48	48	49	0	53	53	54	54	54	54
47	47	48	48	49	0	50	51	52	53	53	53
47	47	48	48	49	0	48	50	51	52	53	53
47	48	48	48	49	0	47	48	50	51	52	52
47	47	47	47	47	0	46	46	50	52	54	54
48	48	48	48	48	49	49	49	49	50	50	51
48	48	48	48	48	49	49	49	49	50	50	50
48	48	48	48	48	48	48	48	48	48	48	48

NORMAL FORCE COEFFICIENT CM BY INTEGRATION = 0.8487

WAVE CD = 0.067824
THEORETICALLY ZERO FOR SUBCRITICAL CASES

-0.4800		U			T B	L
-0.4300		U			T B	L
-0.3700			U		T B	L
-0.2800				U	T B	L
-0.2300				U	T B	L
-0.1700				U	T B	L
-0.1100				U	T B L	
-0.0500				U	T B	
0.0100				U	T B	
0.0700				U	T B	
0.1300				U	T B	
0.1900				U	T B	
0.2500				U	T B	
0.3100				U	T B	
0.3700				U	T B	
0.4300				U	T B	
0.4800				U	T B	

X-Y GRID SYSTEM

2 -0.8027E+01	3 -0.3872E+01	4 -0.2278E+01	5 -0.1410E+01	6 -0.811E+00	7 -0.8471E+00
8 -0.8317E+00	9 -0.4800E+00	10 -0.4804E+00	11 -0.4307E+00	12 -0.4007E+00	13 -0.3708E+00
14 -0.3403E+00	15 -0.3098E+00	16 -0.2782E+00	17 -0.2485E+00	18 -0.2177E+00	19 -0.1888E+00
20 -0.1588E+00	21 -0.1247E+00	22 -0.8357E-01	23 -0.8240E-01	24 -0.3121E-01	25 0 0
26 0 0	27 0.8240E-01	28 0.8357E-01	29 0.1247E+00	30 0.1588E+00	31 0.1888E+00
32 0.2177E+00	33 0.2485E+00	34 0.2782E+00	35 0.3098E+00	36 0.3403E+00	37 0.3708E+00
38 0.4007E+00	39 0.4307E+00	40 0.4804E+00	41 0.4800E+00	42 0.8317E+00	43 0.8471E+00
44 0.811E+00	45 0.1410E+01	46 0.2278E+01	47 0.3872E+01	48 0.8027E+01	
2 -0.1888E+01	3 -0.811E+00	4 -0.8838E+00	5 -0.4281E+00	6 -0.3208E+00	7 -0.2480E+00
8 -0.1888E+00	9 -0.1420E+00	10 -0.1018E+00	11 -0.8882E-01	12 -0.2238E-01	13 -0.8213E-07
14 0.3238E-01	15 0.8882E-01	16 0.1018E+00	17 0.1420E+00	18 0.1888E+00	19 0.2480E+00
20 0.3208E+00	21 0.4281E+00	22 0.8838E+00	23 0.811E+00	24 0.1888E+01	

AIRFOIL COORDINATES

X	YU	YL	UPPER SLOPE	LOWER SLOPE
-0.48000	0.01704	-0.01704	0.81088	-0.81088
-0.48044	0.03212	-0.03212	0.38834	-0.38834
-0.43087	0.04088	-0.04088	0.19721	-0.19882
-0.40072	0.04820	-0.04808	0.18846	-0.18888
-0.37088	0.05161	-0.05130	0.13870	-0.13878
-0.34028	0.05448	-0.05418	0.10408	-0.09850
-0.30882	0.05748	-0.05688	0.08887	-0.08328
-0.27823	0.05804	-0.05838	0.08008	-0.04482
-0.24862	0.05804	-0.05871	0.03171	-0.02878
-0.21788	0.05101	-0.05000	0.01618	-0.01018
-0.18877	0.05188	-0.05028	0.00887	-0.00842
-0.15877	0.05114	-0.05874	-0.01074	0.01704
-0.12470	0.08078	-0.05820	-0.02216	0.02888
-0.09387	0.05861	-0.05800	-0.03120	0.03803
-0.06240	0.05862	-0.05861	-0.04028	0.04738
-0.03121	0.05734	-0.05508	-0.04738	0.05484
0 0	0.05868	-0.05338	-0.05448	0.06248
0.03121	0.05397	-0.05121	-0.05888	0.06874
0.06240	0.05208	-0.04808	-0.05848	0.07488
0.09387	0.04892	-0.04888	-0.05882	0.08028
0.12470	0.04774	-0.04408	-0.07378	0.08888
0.15877	0.04538	-0.04128	-0.07820	0.09020
0.18877	0.04303	-0.03848	-0.07888	0.09488

0.21788	0.04082	-0.03838	-0.08880	0.08891																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
---------	---------	----------	----------	---------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

BOUNDARY LAYER ANALYSIS FOR REYNOLDS NUMBER OF 0.800E+07

X	YUDRIC	DU	SLU	YLORIC	DL	SLU
-0.48000	0.01704	0 0	0.81088	-0.01704	0 0	-0.81088
-0.48044	0.03212	0.00014	0.38834	-0.03212	0.00018	-0.38834
-0.43087	0.04070	0.00021	0.19721	-0.04070	0.00013	-0.19882
-0.40072	0.04871	0.00032	0.18846	-0.04871	0.00018	-0.18847
-0.37088	0.05112	0.00058	0.13870	-0.05112	0.00017	-0.13878
-0.34028	0.05439	0.00088	0.10408	-0.05438	0.00019	-0.09850
-0.30882	0.05877	0.00111	0.08887	-0.05877	0.00022	-0.08328
-0.27823	0.05842	0.00130	0.08008	-0.05842	0.00024	-0.04482
-0.24862	0.05888	0.00148	0.03171	-0.05888	0.00028	-0.02878
-0.21788	0.05888	0.00170	0.01618	-0.05888	0.00028	-0.00842
-0.18877	0.05888	0.00182	0.00887	-0.05888	0.00030	-0.00842
-0.15877	0.05880	0.00214	-0.01074	-0.05880	0.00032	0.01704

-0.12470	0.06888	0.00237	-0.02178	-0.08888	0.00934	0.02888
-0.08387	0.06778	0.00281	-0.03128	-0.08778	0.00038	0.03884
-0.08240	0.06842	0.00288	-0.03867	-0.08842	0.00038	0.04738
-0.03121	0.06880	0.00313	-0.04718	-0.08480	0.00040	0.06531
0.0	0.06294	0.00341	-0.05373	-0.08284	0.00042	0.06248
0.03121	0.06087	0.00371	-0.05982	-0.08087	0.00044	0.06898
0.08240	0.04880	0.00404	-0.06481	-0.07880	0.00046	0.07488
0.08387	0.04818	0.00440	-0.06884	-0.07818	0.00048	0.08048
0.12470	0.04388	0.00479	-0.07248	-0.07358	0.00050	0.08584
0.18877	0.04080	0.00528	-0.07808	-0.06980	0.00052	0.09033
0.18877	0.03781	0.00578	-0.07848	-0.07391	0.00054	0.09482
0.21788	0.03480	0.00644	-0.07890	-0.07480	0.00056	0.09907
0.24852	0.03178	0.00728	-0.07237	-0.07178	0.00058	0.10315
0.27823	0.02880	0.00843	-0.06341	-0.06280	0.00060	0.10713
0.30882	0.02614	0.01018	-0.04283	-0.05514	0.00063	0.11084
0.34028	0.02188	0.01281	-0.01082	-0.02188	0.00070	0.11335
0.37088	0.01808	0.01854	0.00307	-0.01808	0.00081	0.11584
0.40072	0.01438	0.02108	0.02802	-0.01438	0.00087	0.11848
0.43087	0.01088	0.02637	0.08088	-0.01088	0.00116	0.12283
0.48044	0.00888	0.03288	0.08888	-0.00888	0.00135	0.12744
0.48000	0.00288	0.03878	0.14888	-0.00288	0.00183	0.13218

CP BY CENTRAL DIFFERENCES

X	CPU	CPL		
-0.480	-2.888	1.082		
-0.480	-3.473	0.803		
-0.431	-3.438	0.806		
-0.401	-2.482	0.482		
-0.371	-1.783	0.372		
-0.340	-1.582	0.303		
-0.310	-1.382	0.251		
-0.279	-1.231	0.208		
-0.248	-1.104	0.178		
-0.218	-0.887	0.148		
-0.187	-0.801	0.127		
-0.156	-0.814	0.108		
-0.125	-0.734	0.088		
-0.094	-0.651	0.084		
-0.062	-0.583	0.078		
-0.031	-0.528	0.068		
0.0	-0.488	0.062		
0.031	-0.410	0.058		
0.062	-0.354	0.054		
0.094	-0.288	0.052		
0.125	-0.244	0.050		
0.156	-0.190	0.048		
0.187	-0.134	0.048		
0.218	-0.076	0.048		
0.248	-0.018	0.048		
0.279	0.048	0.052		
0.310	0.108	0.058		
0.340	0.133	0.061		
0.371	0.128	0.066		
0.401	0.154	0.071		
0.431	0.178	0.078		
0.460	0.198	0.088		
0.480	0.217	0.183		


X	YU	YL	SLU	SLL
-0.48000	0.01704	-0.01704	0.41088	-0.41088
-0.46044	0.03227	-0.03228	0.35634	-0.35634
-0.43087	0.04082	-0.04084	0.24326	-0.24374
-0.40072	0.04703	-0.04688	0.17412	-0.18947
-0.37088	0.05188	-0.05128	0.13527	-0.12852
-0.34028	0.05528	-0.05458	0.10138	-0.08280
-0.30882	0.05788	-0.05688	0.07221	-0.06599
-0.27823	0.05972	-0.05888	0.04818	-0.04384
-0.24852	0.06084	-0.05871	0.03084	-0.02608
-0.21788	0.06188	-0.06023	0.01615	-0.00893
-0.18877	0.06180	-0.06028	0.00112	0.00522
-0.15877	0.06174	-0.05982	-0.01107	0.01787
-0.12470	0.06122	-0.05820	-0.02178	0.02468
-0.08387	0.06040	-0.05615	-0.03128	0.03484
-0.08240	0.05928	-0.05681	-0.03867	0.04735
-0.03121	0.05783	-0.05520	-0.04714	0.05531
0.0	0.05638	-0.05338	-0.05373	0.06248
0.03121	0.05469	-0.05131	-0.05982	0.06898
0.08240	0.05285	-0.04808	-0.06481	0.07488
0.08387	0.05088	-0.04684	-0.06884	0.08048
0.12470	0.04838	-0.04408	-0.07248	0.08584
0.18877	0.04807	-0.04132	-0.07808	0.09033
0.18877	0.04371	-0.03848	-0.07848	0.09482
0.21788	0.04135	-0.03548	-0.07890	0.09907
0.24852	0.03808	-0.03234	-0.07237	0.10315
0.27823	0.03885	-0.02811	-0.06341	0.10713
0.30882	0.03528	-0.02578	-0.04283	0.11084
0.34028	0.03447	-0.02235	-0.01082	0.11335
0.37088	0.03444	-0.01888	0.00807	0.11584
0.40072	0.03488	-0.01837	0.02802	0.11848
0.43087	0.03834	-0.01178	0.08088	0.12283
0.48044	0.03888	-0.00804	0.08888	0.12744
0.48000	0.04248	-0.00420	0.14888	0.13218

PLANE-FREE STREAM FROM TOP

J: 2,24 LEFT TO RIGHT

NORMAL FORCE COEFFICIENT CM BY INTEGRATION = 0.8202
WAVE CD = 0.083018
THEORETICALLY ZERO FOR SUBCRITICAL CASES

CASE NO 509

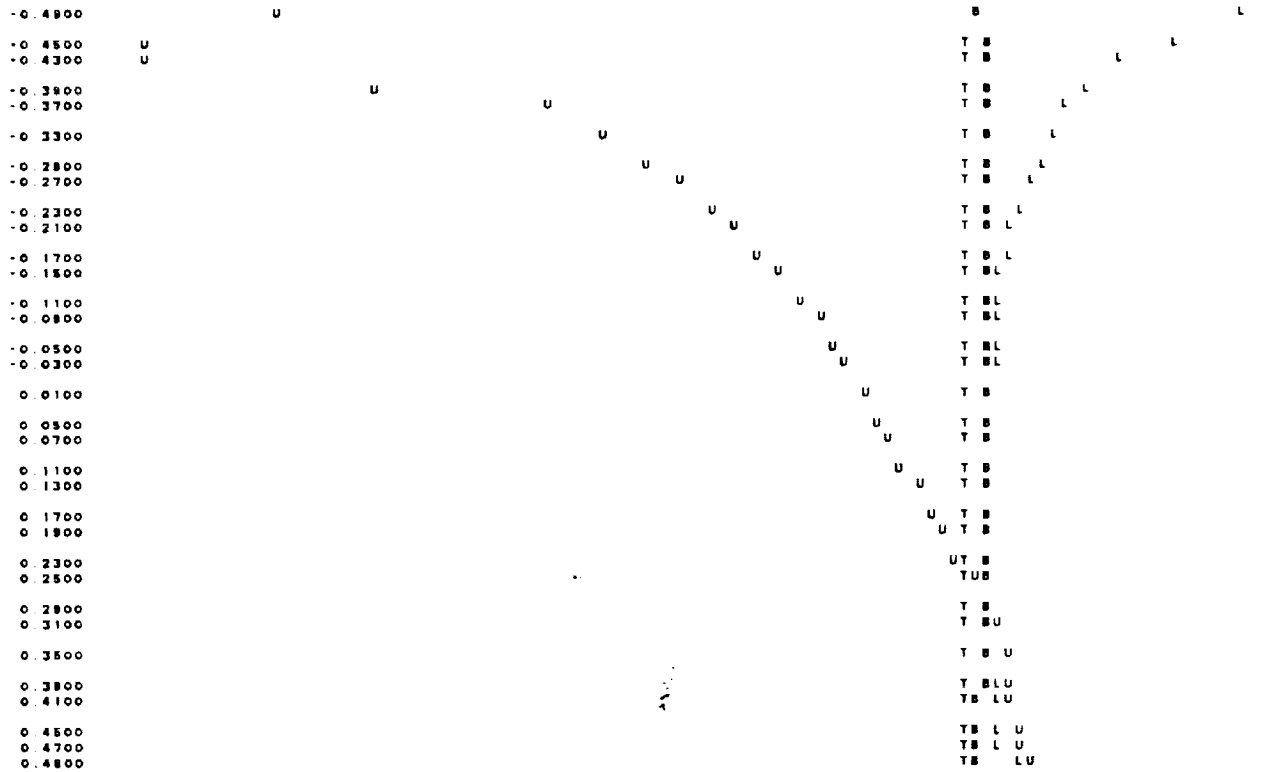

-3.473 -3.018 -2.556 -2.112 -1.659 -1.205 -0.752 -0.298 0.155 0.508 1.062
PRESSURE COEFFICIENT

CPSTAR = -2.1217 CLCIR = 0.8647

CL = 0.8221 CD = 0.074291 CMLE = -0.1708 CDF = 0.011273 CMC4 = 0.0597

1. Report No. NASA CR-4270		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle A Direct-Inverse Method for Transonic and Separated Flows About Airfoils				5. Report Date January 1990	
				6. Performing Organization Code	
7. Author(s) Leland A. Carlson				8. Performing Organization Report No. TAMRF Report 3224-85-12	
				10. Work Unit No. 505-61-21-03	
9. Performing Organization Name and Address Texas A&M University Aerospace Engineering Department College Station, TX 77843-3141				11. Contract or Grant No. NSG-1174	
				13. Type of Report and Period Covered Contractor Report	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23665-5225				14. Sponsoring Agency Code	
15. Supplementary Notes Langley Technical Monitor: Joel L. Everhart Final Report					
16. Abstract A direct-inverse technique and computer program called TAMSEP that can be used for the analysis of the flow about airfoils at subsonic and low transonic freestream velocities is presented. The method is based upon a direct-inverse nonconservative full potential inviscid method, a Thwaites laminar boundary layer technique, and the Barnwell turbulent momentum integral scheme; and it is formulated using Cartesian coordinates. Since the method utilizes inverse boundary conditions in regions of separated flow, it is suitable for predicting the flowfield about airfoils having trailing edge separated flow under high lift conditions. Comparisons with experimental data indicate that the method should be a useful tool for applied aerodynamic analyses.					
17. Key Words (Suggested by Author(s)) Supercritical airfoils High lift Viscous interactions Transonic Separated Flows Low speed				18. Distribution Statement Unclassified - Unlimited Subject Category 02	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of pages 72	
				22. Price A04	

